

REMO 500 GX53 LED

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Classe di isolamento II, grado di protezione IP55.*



R60.000.D9K


CCT SETTABLE

SDCM <6

3000 K 4000 K 6500 K

	UV-TREATED	DOUBLE INSULATION	

PUBLIC WALL POST



REMO 500 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***TETTO** completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

***DIFFUSORE** realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*

Decorative connection **RING** to be fixed on the luminaries diffuser.

***ANELLO** decorativo di connessione da fissare sul diffusore dell'apparecchio.*

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin **CONE REFLECTOR**, to direct downwards the lighting output.

***BASE** dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un CONO riflettente in resina bianca per indirizzare verso il basso il flusso luminoso.*

REMO 500 GX53 LED

R60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 9 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,238

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☒ Clear ☐ Opal

GX53 LED





- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin **CEILING** provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	9x 10W 90W	11610 lm	6500 K	.D9K
			4000 K	
			3000 K	

PHOTOMETRIC DATA SAMPLE



**REMO 500 GX53 LED
9X10W**

POST height 5mt
10x10mt area: average 31 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

REMO 500

GRAND SIZE



MADE IN ITALY

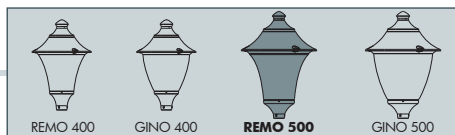

EKTOR 6000/REMO500
R60.384.000
Pcs 1 Kg 84 mc 1,32

EKTOR 5000/REMO500	AKILLE 5000/REMO500
R60.377.000	R60.427.000
Pcs 1 Kg 54,5 mc 0,39	
EKTOR 4500/REMO500	AKILLE 4500/REMO500
R60.374.000	R60.424.000
Pcs 1 Kg 49 mc 0,36	

EKTOR 4000/REMO500	AKILLE 4000/REMO500
R60.371.000	R60.421.000
Pcs 1 Kg 43,5 mc 0,33	
EKTOR 3500/REMO500	AKILLE 3500/REMO500
R60.367.000	R60.417.000
Pcs 1 Kg 40,1 mc 0,31	
EKTOR 3000/REMO500	AKILLE 3000/REMO500
R60.364.000	R60.414.000
Pcs 1 Kg 36,7 mc 0,28	

REMO500
R60.000
Pcs 1 Kg 9 mc 0,11

PILAR/REMO500
R60.253
Pcs 1 Kg 11 mc 0,14

NEW LOT/REMO500
R60.115
Pcs 1 Kg 9,3 mc 0,12