

LETI 100 ROUND RECESSED LAMP



Recessed wall lamp with round shape, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Supplied as standard with long-life powerful and efficient TÜV approved GX53 LED lamp 3W-350lm included. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada LED per incasso a muro con forma circolare, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina approvata TÜV di lunga durata ed elevata efficienza a LED GX53 (3W - 350lm). Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



LETI 100 ROUND
2C1.000



LETI 100 ROUND-GR
2C2.000



LETI 100 ROUND-EL
2C3.000



LETI 100 ROUND-ST
2C4.000

GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**
long-life and efficient LED light sources
- **Built-in driver:**
quick and easy lamp replacement
- **Great flexibility:**
GX53 standard lamp holder
- **Future-proofed luminaries:**
performances easy to upgrade to latest technology developments



2C1.000.G1L





LETI 100
ROUND



LETI 100
SQUARE



LETI 200



LETI 300

LETI LED 100 ROUND - COMPONENTS



COVER made in shockproof resin material, UV rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

IP66

Opal DIFFUSER with flat shape made in polymethylmethacrylate (PMMA).

DIFFUSORE con forma piatta fabbricato in metacrilato (PMMA) opale.

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

Supplied as standard with TÜV approved **GX53 LED LAMP 3W - 350 lm included.**

Forniti nella versione standard con inclusa **LAMPADINA A LED GX53** approvata TÜV **3W - 350 lm.**

HOUSING made in shockproof resin material, UV rays stabilized, rust and corrosion free, provided complete with GX53 lampholder.

CASSA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione, fornita completa di portalamпада GX53.

INSTALLATION HOUSING made in resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 100 ROUND

— ø 134 —



Dimensions and weight

Diameter: Ø 134 mm
Installation housing depth: 80 mm
Weight: 0,5 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☐ Opal

AVAILABLE LAMPS

LED LAMP INCLUDED	GX53 3W 350 lm	Add. Suffix	
		4000 K	.G1L
		3000 K	.G1R



3W - GX53 Lamp
4000 K: H.IED.G53
3000 K: H.IED.G53.3K



LED VERSION WITH GX53 LAMP INCLUDED

	Power	Luminous Flux	Kelvin Colour	Life Time (hours)	Voltage Range	SAVE
	3W	350lm	4.000K	25.000h	100-240V 50/60 Hz	-93%
			3.000K			
GX53		115 lm/W				



A++	A+	A+
A		
B		
C		
D		
E		

LETI 100 ROUND RECESSED LAMP




2C3.000.G1L



2C1.000.G1L



2C4.000.G1L

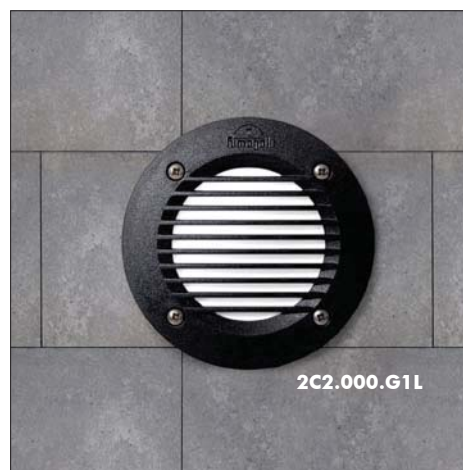

2C2.000.G1L




LETI 100
ROUND



LETI 100
SQUARE



LETI 200



LETI 300

LETI 100 ROUND		
2C1.000.G1L	3W	2C1.000.G1R
4000K	GX53 LED LAMP INCLUDED	3000K
Pcs 48 Kg 24 mc 0,12		

LETI 100 ROUND-GR		
2C2.000.G1L	3W	2C2.000.G1R
4000K	GX53 LED LAMP INCLUDED	3000K
Pcs 48 Kg 24 mc 0,12		

LETI 100 ROUND-EL		
2C3.000.G1L	3W	2C3.000.G1R
4000K	GX53 LED LAMP INCLUDED	3000K
Pcs 48 Kg 24 mc 0,12		

LETI 100 ROUND-ST		
2C4.000.G1L	3W	2C4.000.G1R
4000K	GX53 LED LAMP INCLUDED	3000K
Pcs 48 Kg 24 mc 0,12		

		3W = 40W smd LED (3W) 350Lm 25.000 h 100-240V 50/60Hz 100mA
4000K (daylight white)	H.LED.G53	
3000K (warm white)	H.LED.G53.3K	

EXTRALETI 100 ROUND SURFACE LAMP



Surface wall lamp with round shape, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Supplied as standard with long-life powerful and efficient TÜV approved GX53 LED lamp 3W-350lm included. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada a muro con forma circolare, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina approvata TÜV di lunga durata ed elevata efficienza a LED GX53 (3W - 350lm). Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



EXTRALETI 100
ROUND
2S1.000



EXTRALETI 100
ROUND-GR
2S2.000



EXTRALETI 100
ROUND-EL
2S3.000



EXTRALETI 100
ROUND-ST
2S4.000

GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**
long-life and efficient LED light sources
- **Built-in driver:**
quick and easy lamp replacement
- **Great flexibility:**
GX53 standard lamp holder
- **Future-proofed luminaries:**
performances easy to upgrade to latest technology developments



2S3.000.G1L



EXTRALETI LED 100 ROUND - COMPONENTS

IP66



COVER made in shockproof resin material, UV rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

IP66



Opal **DIFFUSER** with flat shape made in polymethylmethacrylate (PMMA).

DIFFUSORE con forma piatta fabbricato in metacrilato (PMMA) opale.



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



Supplied as standard with TÜV approved **GX53 LED LAMP 3W - 350 lm included.**

Forniti nella versione standard con inclusa **LAMPADINA A LED GX53** approvata TÜV **3W - 350 lm.**



BODY made in shockproof resin material, UV rays stabilized, rust and corrosion free, provided complete with GX53 lampholder.

CORPO in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione, fornito completo di portalamпада GX53.

EXTRALETI 100 ROUND

Ø 140



Dimensions and weight

Diameter: Ø 140 mm
Depth: 64/85 mm
Weight: 0,5 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

AVAILABLE LAMPS


LED LAMP INCLUDED	GX53 3W 350 lm	Add. Suffix	
		4000 K	3000 K
		.G1L	.G1R

	3W - GX53 Lamp 4000 K: H.IED.G53 3000 K: H.IED.G53.3K
--	--



LED VERSION WITH GX53 LAMP INCLUDED

	Power	Luminous Flux	Kelvin Colour	Life Time (hours)	Voltage Range	SAVE
	3W	350Lm	4.000K	25.000h	100-240V 50/60 Hz	40W INCANDESCENT
			3.000K			
GX53		115 lm/W				-93%



EXTRALETI 100 ROUND

SURFACE LAMP



EXTRALETI 100 ROUND

2S1.000.G1L **3W** 2S1.000.G1R

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 48
Kg 24
mc 0,12

EXTRALETI 100 ROUND-GR

2S2.000.G1L **3W** 2S2.000.G1R

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 48
Kg 24
mc 0,12

EXTRALETI 100 ROUND-EL

2S3.000.G1L **3W** 2S3.000.G1R

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 48
Kg 24
mc 0,12

EXTRALETI 100 ROUND-ST

2S4.000.G1L **3W** 2S4.000.G1R

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 48
Kg 24
mc 0,12

3W = 40W

smd LED (3W)
350Lm
25.000 h
100-240V
50/60Hz 100mA

4000K (daylight white)	H.LED.G53
3000K (warm white)	H.LED.G53.3K

LETI 100 SQUARE RECESSED LAMP



Recessed wall lamp with square shape, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Supplied as standard with long-life powerful and efficient TÜV approved GX53 LED lamp 3W-350lm included. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada ad incasso a muro con forma quadra, realizzata in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina approvata TÜV di lunga durata ed elevata efficienza a LED GX53 (3W - 350lm). Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



LETI 100 SQUARE
3C1.000



LETI 100 SQUARE-GR
3C2.000



LETI 100 SQUARE-EL
3C3.000



LETI 100 SQUARE-ST
3C4.000


GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**
long-life and efficient LED light sources
- **Built-in driver:**
quick and easy lamp replacement
- **Great flexibility:**
GX53 standard lamp holder
- **Future-proofed luminaries:**
performances easy to upgrade to latest technology developments



3C1.000.G1L

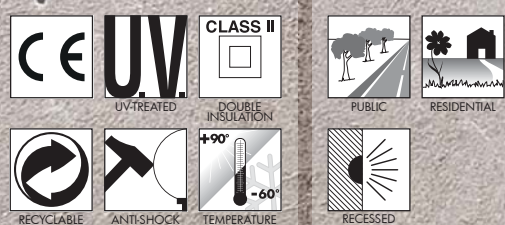




LETI 100
ROUND



LETI 100
SQUARE



LETI 200



LETI 300

LETI LED 100 SQUARE - COMPONENTS



COVER made in shockproof resin material, UV rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

IP66



Opal DIFFUSER with flat shape made in polymethylmethacrylate (PMMA).

DIFFUSORE con forma piatta fabbricato in metacrilato (PMMA) opale.



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



Supplied as standard with TÜV approved **GX53 LED LAMP 3W - 350 lm included.**

Forniti nella versione standard con inclusa **LAMPADINA A LED GX53** approvata TÜV **3W - 350 lm.**



HOUSING made in shockproof resin material, UV rays stabilized, rust and corrosion free, provided complete with GX53 lampholder.

CASSA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione, fornita completa di portalamпада GX53.



INSTALLATION HOUSING made in resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 100 SQUARE



Dimensions and weight

Height: 115 mm
Width: 115 mm
Installation housing depth: 80 mm
Weight: 0,5 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☐ Opal

AVAILABLE LAMPS

LED LAMP INCLUDED	GX53 3W 350 lm	Add. Suffix	
		4000 K	.G1L
		3000 K	.G1R



3W - GX53 Lamp
4000 K: H.ILED.G53
3000 K: H.ILED.G53.3K



LED VERSION WITH GX53 LAMP INCLUDED

	Power	Luminous Flux	Kelvin Colour	Life Time (hours)	Voltage Range	SAVE
	3W	350Lm	4.000K	25.000h	100-240V 50/60 Hz	40W INCANDESCENT
			3.000K			
GX53		115 lm/W				-93%



A++	A+	A+	A	B	C	D	E
-----	----	-----------	---	---	---	---	---

LETI 100 SQUARE RECESSED LAMP






LETI 100
ROUND



LETI 100
SQUARE



LETI 200



LETI 300

LETI 100 SQUARE

3C1.000.G1L


3W

3C1.000.G1R

4000K

GX53 LED LAMP INCLUDED

3000K

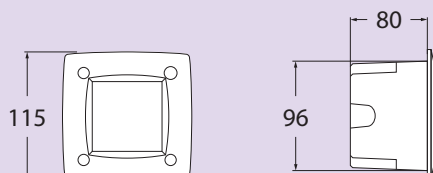

Pcs 48
Kg 24
mc 0,12

LETI 100 SQUARE-GR

3C2.000.G1L


3W

3C2.000.G1R

4000K

GX53 LED LAMP INCLUDED

3000K

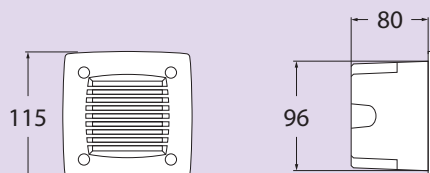

Pcs 48
Kg 24
mc 0,12

LETI 100 SQUARE-EL

3C3.000.G1L


3W

3C3.000.G1R

4000K

GX53 LED LAMP INCLUDED

3000K

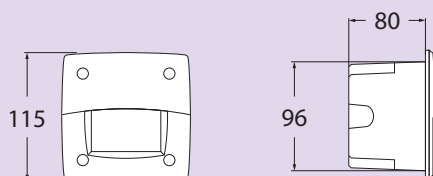

Pcs 48
Kg 24
mc 0,12

LETI 100 SQUARE-ST

3C4.000.G1L


3W

3C4.000.G1R


4000K

GX53 LED LAMP INCLUDED

3000K

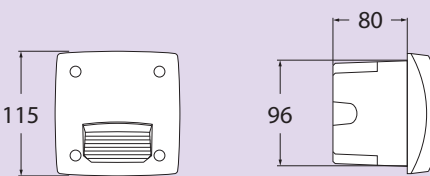

Pcs 48
Kg 24
mc 0,12



TUV
Production monitored
Safety Tested

3W = 40W

smd LED (3W)
350Lm
25.000 h
100-240V
50/60Hz 100mA

4000K (daylight white)

H.LED.G53

3000K (warm white)

H.LED.G53.3K

EXTRALETI 100 SQUARE SURFACE LAMP

Surface wall lamp with square shape, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Supplied as standard with long-life powerful and efficient TÜV approved GX53 LED lamp 3W-350lm included. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada a muro con forma quadra, realizzata in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina approvata TÜV di lunga durata ed elevata efficienza a LED GX53 (3W - 350lm). Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



EXTRALETI 100
SQUARE
351.000



EXTRALETI 100
SQUARE-GR
352.000



EXTRALETI 100
SQUARE-EL
353.000



EXTRALETI 100
SQUARE-ST
354.000

GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**
long-life and efficient LED light sources
- **Built-in driver:**
quick and easy lamp replacement
- **Great flexibility:**
GX53 standard lamp holder
- **Future-proofed luminaries:**
performances easy to upgrade to latest technology developments



354.000.G1L






EXTRALETI
100 ROUND



EXTRALETI
100 SQUARE



EXTRALETI 200



EXTRALETI 300

EXTRALETI 100 SQUARE SURFACE LAMP

EXTRALETI LED 100 SQUARE - COMPONENTS



COVER made in shockproof resin material, UV rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattacabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

IP66



Opal **DIFFUSER** with flat shape made in polymethylmethacrylate (PMMA).

DIFFUSORE con forma piatta fabbricato in metacrilato (PMMA) opale.



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



Supplied as standard with TÜV approved **GX53 LED LAMP 3W - 350 lm** included.

Forniti nella versione standard con inclusa **LAMPADINA A LED GX53** approvata TÜV **3W - 350 lm**.



BODY made in shockproof resin material, UV rays stabilized, rust and corrosion free, provided complete with GX53 lampholder.

CORPO in resina antiurto, stabilizzato ai raggi UV, inattacabile da ruggine e corrosione, fornito completo di portalamпада GX53.

EXTRALETI 100 SQUARE



Dimensions and weight

Height: 120 mm
Width: 120 mm
Depth: 64/85 mm
Weight: 0,5 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☐ Opal

AVAILABLE LAMPS

LED LAMP INCLUDED	GX53 3W 350 lm	Add. Suffix	
		4000 K	.G1L
		3000 K	.G1R



3W - GX53 Lamp
4000 K: H.ILED.G53
3000 K: H.ILED.G53.3K



LED VERSION WITH GX53 LAMP INCLUDED

	Power	Luminous Flux	Kelvin Colour	Life Time (hours)	Voltage Range	SAVE
	3W	350Lm	4.000K	25.000h	100-240V 50/60 Hz	-93%
			3.000K			
GX53		115 lm/W			40W INCANDESCENT	



EXTRALETI 100 SQUARE SURFACE LAMP






EXTRALETI
100 ROUND



**EXTRALETI
100 SQUARE**



EXTRALETI 200



EXTRALETI 300

EXTRALETI 100 SQUARE SURFACE LAMP

EXTRALETI 100 SQUARE

3S1.000.G1L


3W

3S1.000.G1R

4000K

GX53 LED LAMP INCLUDED

3000K



Pcs 48
Kg 24
mc 0,12

EXTRALETI 100 SQUARE-GR

3S2.000.G1L


3W

3S2.000.G1R

4000K

GX53 LED LAMP INCLUDED

3000K



Pcs 48
Kg 24
mc 0,12

EXTRALETI 100 SQUARE-EL

3S3.000.G1L


3W

3S3.000.G1R

4000K

GX53 LED LAMP INCLUDED

3000K



Pcs 48
Kg 24
mc 0,12

EXTRALETI 100 SQUARE-ST

3S4.000.G1L


3W

3S4.000.G1R


4000K

GX53 LED LAMP INCLUDED

3000K



Pcs 48
Kg 24
mc 0,12



TUV
Production monitored
Safety Tested

3W = 40W

smd LED (3W)
350Lm
25.000 h
100-240V
50/60Hz 100mA

4000K (daylight white)

H.LED.G53

3000K (warm white)


H.LED.G53.3K

LETI 200 RECESSED LAMP




Recessed wall lamp with rectangular shape, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Supplied as standard with long-life powerful and efficient TÜV approved GX53 LED lamp 3W-350lm included. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada ad incasso a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina approvata TÜV di lunga durata ed elevata efficienza a LED GX53 (3W - 350lm). Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



LETI 200
451.000



LETI 200-GL
452.000



LETI 200-RS
453.000



LETI 200-HS
454.000



LETI 200-VP
455.000

GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**
long-life and efficient LED light sources
- **Built-in driver:**
quick and easy lamp replacement
- **Great flexibility:**
GX53 standard lamp holder
- **Future-proofed luminaries:**
performances easy to upgrade to latest technology developments



4C4.000.G1L






LETI 100
ROUND



LETI 100
SQUARE



LETI 200



LETI 300

LETI LED 200 - COMPONENTS



COVER made in shockproof resin material, UV rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.


COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

IP66



Opal DIFFUSER with flat shape made in polymethylmethacrylate (PMMA).

DIFFUSORE con forma piatta fabbricato in metacrilato (PMMA) opale.



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



Supplied as standard with TÜV approved **GX53 LED LAMP 3W - 350 lm included.**

Forniti nella versione standard con inclusa **LAMPADINA A LED GX53** approvata TÜV **3W - 350 lm.**



HOUSING made in shockproof resin material, UV rays stabilized, rust and corrosion free, provided as standard with GX53 lampholder.

CASSA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione fornita nella versione standard completa di portalampada GX53.



INSTALLATION HOUSING made in resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 200



Dimensions and weight

Height: 113 mm
Width: 188 mm
Installation housing depth: 98 mm
Weight: 0,7 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☐ Opal

AVAILABLE LAMPS

		Ref. Code	
LED LAMP INCLUDED	GX53 3W 350 lm	4000 K	.G1L
		3000 K	.G1R
CFL LED	E14 MAX 100 mm	.E14	




3W - GX53 Lamp
4000 K: H.IED.G53
3000 K: H.IED.G53.3K



LED VERSION WITH GX53 LAMP INCLUDED

	Power	Luminous Flux	Kelvin Colour	Life Time (hours)	Voltage Range	SAVE
	3W	350Lm	4.000K	25.000h	100-240V 50/60 Hz	40W INCANDESCENT
			3.000K			
GX53		115 lm/W				-93%



LETI 200

RECESSED LAMP





LETI 100
ROUND



LETI 100
SQUARE



LETI 200



LETI 300

LETI 200

4C1.000.G1L **3W** 4C1.000.G1R

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 36
Kg 25
mc 0,12

LETI 200-GL

4C2.000.G1L **3W** 4C2.000.G1R

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 36
Kg 25
mc 0,12

LETI 200-RS

4C3.000.G1L **3W** 4C3.000.G1R

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 36
Kg 25
mc 0,12

LETI 200-HS

4C4.000.G1L **3W** 4C4.000.G1R

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 36
Kg 25
mc 0,12

LETI 200-VP

4C5.000.G1L **3W** 4C5.000.G1R

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 36
Kg 25
mc 0,12

3W = 40W

smd LED (3W)
350lm
25.000 h
100-240V
50/60Hz 100mA


4000K (daylight white)	H.LED.G53
3000K (warm white)	H.LED.G53.3K

EXTRALETI 200 SURFACE LAMP



Surface wall lamp with rectangular shape, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Supplied as standard with long-life powerful and efficient TÜV approved GX53 LED lamp 3W-350lm included. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina approvata TÜV di lunga durata ed elevata efficienza a LED GX53 (3W - 350lm). Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



EXTRALETI 200
451.000



EXTRALETI 200-GL
452.000



EXTRALETI 200-RS
453.000



EXTRALETI 200-HS
454.000



EXTRALETI 200-VP
455.000


GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**
long-life and efficient LED light sources
- **Built-in driver:**
quick and easy lamp replacement
- **Great flexibility:**
GX53 standard lamp holder
- **Future-proofed luminaries:**
performances easy to upgrade to latest technology developments



451.000.G1L

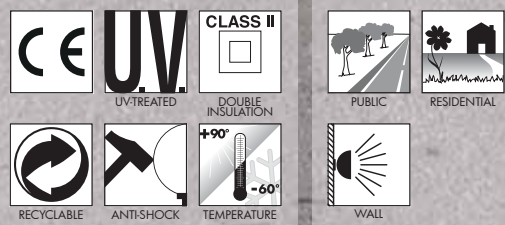




EXTRALETI
100 ROUND



EXTRALETI
100 SQUARE



EXTRALETI 200



EXTRALETI 300

EXTRALETI LED 200 - COMPONENTS



COVER made in shockproof resin material, UV rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.


COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

IP66



Opal **DIFFUSER** with flat shape made in polymethylmethacrylate (PMMA).

DIFFUSORE con forma piatta fabbricato in metacrilato (PMMA) opale.



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



Supplied as standard with TÜV approved **GX53 LED LAMP 3W - 350 lm** included.

Forniti nella versione standard con inclusa **LAMPADINA A LED GX53** approvata TÜV **3W - 350 lm**.



BODY made in shockproof resin material, UV rays stabilized, rust and corrosion free, provided as standard with GX53 lampholder.

CORPO in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione, fornito nella versione standard completo di portalamada GX53.

EXTRALETI 200



Dimensions and weight

Height: 120 mm
Width: 200 mm
Depth: 65/85 mm
Weight: 0,7 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☐ Opal

AVAILABLE LAMPS

Add. Suffix			
LED LAMP INCLUDED	GX53 3W 350 lm	4000 K	.G1L
		3000 K	.G1R



3W - GX53 Lamp
4000 K: H.ILED.G53
3000 K: H.ILED.G53.3K



LED VERSION WITH GX53 LAMP INCLUDED

	Power	Luminous Flux	Kelvin Colour	Life Time (hours)	Voltage Range	SAVE
	3W	350Lm	4.000K	25.000h	100-240V 50/60 Hz	40W INCANDESCENT
			3.000K			
GX53		115 lm/W				-93%



EXTRALETI 200

SURFACE LAMP





EXTRALETI
100 ROUND



EXTRALETI
100 SQUARE



EXTRALETI 200



EXTRALETI 300

EXTRALETI 200

4S1.000.G1L


3W

4S1.000.G1R

4000K

GX53 LED LAMP INCLUDED

3000K

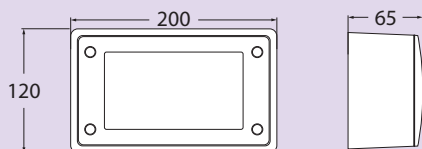

Pcs 36
Kg 22
mc 0,12

EXTRALETI 200-GL

4S2.000.G1L


3W

4S2.000.G1R

4000K

GX53 LED LAMP INCLUDED

3000K

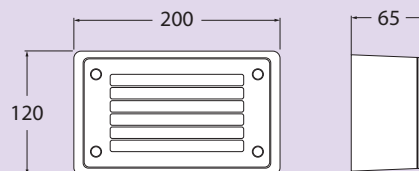

Pcs 36
Kg 22
mc 0,12

EXTRALETI 200-RS

4S3.000.G1L


3W

4S3.000.G1R

4000K

GX53 LED LAMP INCLUDED

3000K

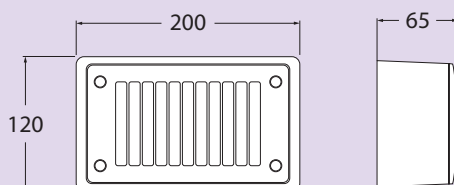

Pcs 36
Kg 22
mc 0,12

EXTRALETI 200-HS

4S4.000.G1L


3W

4S4.000.G1R

4000K

GX53 LED LAMP INCLUDED

3000K

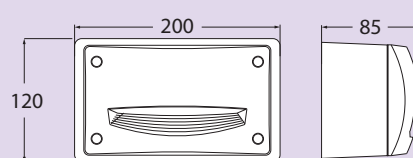

Pcs 36
Kg 22
mc 0,12

EXTRALETI 200-VP

4S5.000.G1L


3W

4S5.000.G1R

4000K

GX53 LED LAMP INCLUDED


3000K

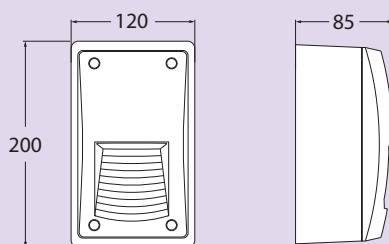

Pcs 36
Kg 22
mc 0,12



TUV
Production monitored
Safety Tested



3W = 40W

smd LED (3W)
350lm
25.000 h
100-240V
50/60Hz 100mA

4000K (daylight white)

H.LED.G53

3000K (warm white)


H.LED.G53.3K

LETI 300 RECESSED LAMP



Recessed wall lamp with rectangular shape, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Supplied as standard with 2 x GX53 LED lamps long-life powerful and efficient TÜV approved 6W-700lm included. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada LED per incasso a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Fornita con incluse 2 lampadine a LED GX53 approvate TÜV di lunga durata ed elevata efficienza per un totale di 6W-700lm. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



LETI 300
5C1.000



LETI 300-GL
5C2.000



LETI 300-RS
5C3.000



LETI 300-HS
5C4.000



LETI 300-VP
5C5.000

GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**
long-life and efficient LED light sources
- **Built-in driver:**
quick and easy lamp replacement
- **Great flexibility:**
GX53 standard lamp holder
- **Future-proofed luminaries:**
performances easy to upgrade to latest technology developments



5C4.000.G2L





LETI 100
ROUND



LETI 100
SQUARE



LETI 200



LETI 300

LETI LED 300 - COMPONENTS



COVER made in shockproof resin material, UV rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

IP66



Opal **DIFFUSER** with flat shape made in polymethylmethacrylate (PMMA).

DIFFUSORE con forma piatta fabbricato in metacrilato (PMMA) opale.



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



Supplied as standard with TÜV approved **2 x GX53 LED LAMPS 2 x 3W - 700 lm included.**

Forniti nella versione standard con incluse **2 LAMPADINE A LED GX53** approvate TÜV **2 x 3W - 700 lm.**



HOUSING made in shockproof resin material, UV rays stabilized, rust and corrosion free, provided as standard with 2 x GX53 lampholders.

CASSA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione fornita nella versione standard completa di 2 portalampada GX53.



INSTALLATION HOUSING made in resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 300



Dimensions and weight

Height: 113 mm
Width: 293 mm
Installation housing depth: 98 mm
Weight: 1 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☐ Opal

AVAILABLE LAMPS


		Add. Suffix	
LED 2 LAMPS INCLUDED	2x GX53 6W 700 lm	4000 K	.G2L
		3000 K	.G2R
CFL LED	E27 MAX 180 mm		.E27
	G23		.01G
	2x G23		.02G
	G24d-3		.03G

	3W - GX53 Lamp 4000 K: H.LED.G53 3000 K: H.LED.G53.3K
--	--




LED VERSION WITH GX53 LAMP INCLUDED

	Power	Luminous Flux	Kelvin Colour	Life Time (hours)	Voltage Range	SAVE
	2x3W 6W	700Lm	4.000K	25.000h	100-240V 50/60 Hz	75W INCANDESCENT
			3.000K			
GX53		115 lm/W				



LETI 300

RECESSED LAMP

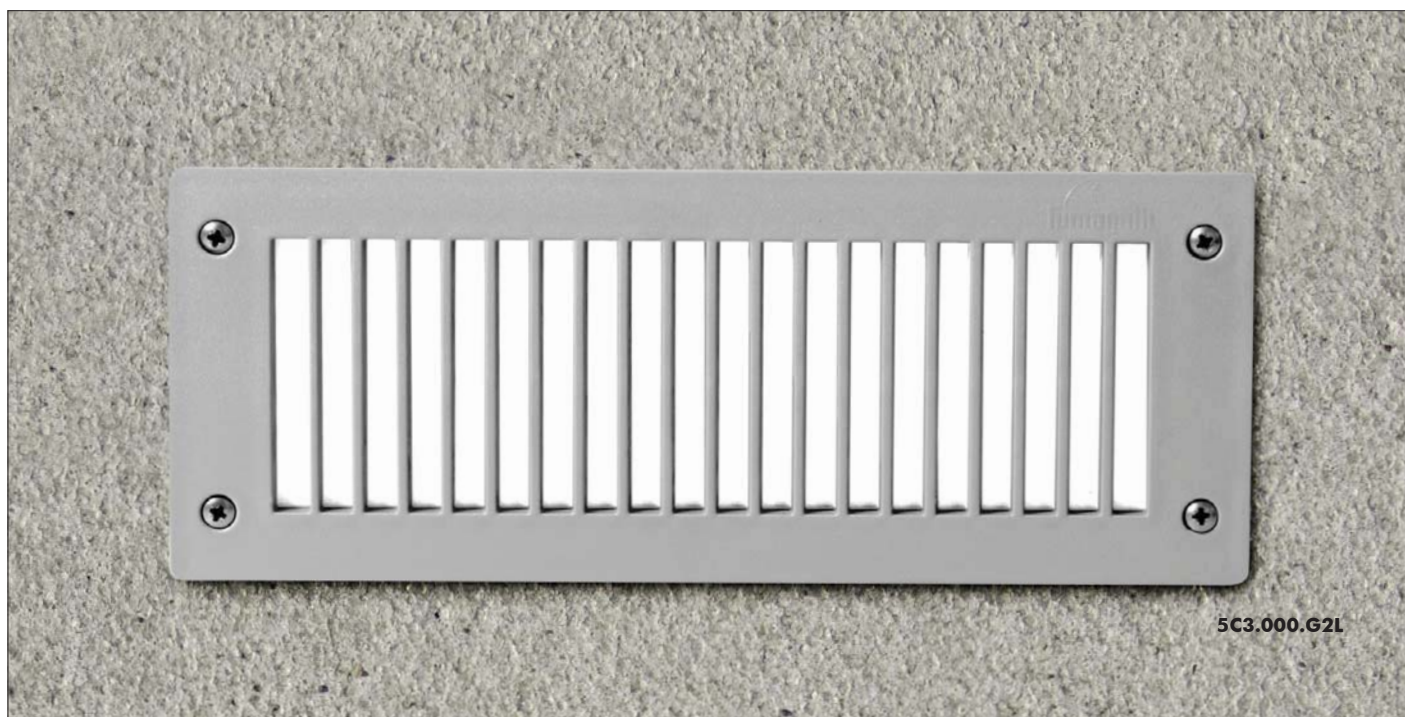



LETI 100
ROUND



LETI 100
SQUARE



LETI 200



LETI 300

LETI 300

5C1.000.G2L **2x 3W** 5C1.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

Pcs 24
Kg 28
mc 0,12

LETI 300-GL

5C2.000.G2L **2x 3W** 5C2.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

Pcs 24
Kg 28
mc 0,12

LETI 300-RS

5C3.000.G2L **2x 3W** 5C3.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

Pcs 24
Kg 28
mc 0,12

LETI 300-HS

5C4.000.G2L **2x 3W** 5C4.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

Pcs 24
Kg 28
mc 0,12

LETI 300-VP

5C5.000.G2L **2x 3W** 5C5.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

Pcs 24
Kg 28
mc 0,12

ENERGIA
europea
europea

A++
A+
A
B
C
D
E

A+

TUV
Production monitored
Safety Tested

2x 3W = 75W

smd LED (3W)
350Lm
25.000 h
100-240V
50/60Hz 100mA


4000K (daylight white)	H.LED.G53
3000K (warm white)	H.LED.G53.3K

EXTRALETI 300 SURFACE LAMP




Surface wall lamp with rectangular shape, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Supplied as standard with 2 x GX53 LED lamps long-life powerful and efficient TÜV approved 6W-700lm included. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Fornita con incluse 2 lampadine a LED GX53 approvate TÜV di lunga durata ed elevata efficienza per un totale di 6W-700lm. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



EXTRALETI 300
551.000



EXTRALETI 300-GL
552.000



EXTRALETI 300-RS
553.000



EXTRALETI 300-HS
554.000



EXTRALETI 300-VP
555.000

GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:**
long-life and efficient LED light sources
- **Built-in driver:**
quick and easy lamp replacement
- **Great flexibility:**
GX53 standard lamp holder
- **Future-proofed luminaries:**
performances easy to upgrade to latest technology developments



551.000.G2L





EXTRALETI 100 ROUND



EXTRALETI 100 SQUARE



EXTRALETI 200



EXTRALETI 300

EXTRALETI LED 300 - COMPONENTS



COVER made in shockproof resin material, UV rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

IP66



Opal **DIFFUSER** with flat shape made in polymethylmethacrylate (PMMA).

DIFFUSORE con forma piatta fabbricato in metacrilato (PMMA) opale.



High quality silicone rubber **GASKET** to ensure high protection against external agents.



GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



Supplied as standard with TÜV approved **2 x GX53 LED LAMPS 2 x 3W - 700 lm included.**

Forniti nella versione standard con incluse **2 LAMPADINE A LED GX53** approvate TÜV **2 x 3W - 700 lm.**

BODY made in shockproof resin material, UV rays stabilized, rust and corrosion free, provided as standard with 2 x GX53 lampholders.

CORPO in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione, fornito nella versione standard completo di 2 portalampada GX53.

EXTRALETI 300



Dimensions and weight

Height: 132 mm
Width: 313 mm
Depth: 93/113 mm
Weight: 1 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☐ Opal

AVAILABLE LAMPS


		Add. Suffix	
 2 LAMPS INCLUDED	2x GX53 6W 700 lm	4000 K	.G2L
		3000 K	.G2R
 CFL LED	E27 MAX 180 mm		.E27
	G23		.01G
	2x G23		.02G
	G24d-3		.03G

	3W - GX53 Lamp 4000 K: H.IED.G53 3000 K: H.IED.G53.3K
--	--



LED VERSION WITH GX53 LAMP INCLUDED

	Power	Luminous Flux	Kelvin Colour	Life Time (hours)	Voltage Range	SAVE
	2x3W 6W	700Lm	4.000K	25.000h	100-240V 50/60 Hz	75W INCANDESCENT
			3.000K			
GX53		115 lm/W				-92%



EXTRALETI 300

SURFACE LAMP





EXTRALETI
100 ROUND



EXTRALETI
100 SQUARE



EXTRALETI 200




EXTRALETI 300

EXTRALETI 300 SURFACE LAMP

EXTRALETI 300

5S1.000.G2L **2x 3W** 5S1.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

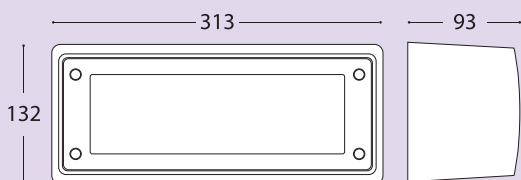


Pcs 16
Kg 21
mc 0,12

EXTRALETI 300-GL

5S2.000.G2L **2x 3W** 5S2.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

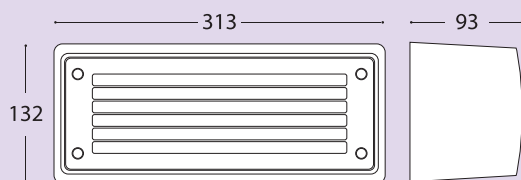


Pcs 16
Kg 21
mc 0,12

EXTRALETI 300-RS

5S3.000.G2L **2x 3W** 5S3.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

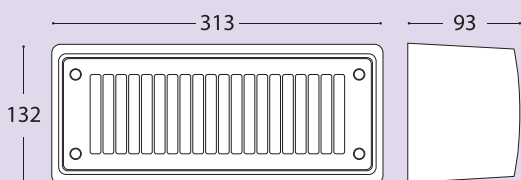


Pcs 16
Kg 21
mc 0,12

EXTRALETI 300-HS

5S4.000.G2L **2x 3W** 5S4.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

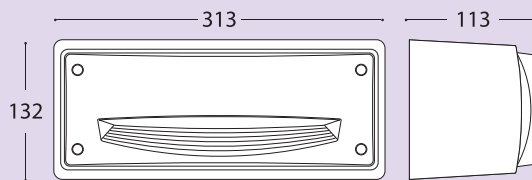


Pcs 16
Kg 21
mc 0,12


EXTRALETI 300-VP

5S5.000.G2L **2x 3W** 5S5.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

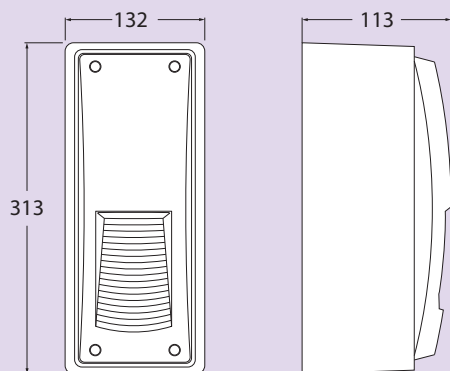

Pcs 16
Kg 21
mc 0,12



2x 3W = 75W

smd LED (3W)
350Lm
25.000 h
100-240V
50/60Hz 100mA

4000K (daylight white)

H.LED.G53

3000K (warm white)

H.LED.G53.3K