

LUCA HIGH POWER LED

LARGE SIZE



E27 hexagonal lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna esagonale E27 in stile revival moderno, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90%
HUMIDITY

VOLTAGE SURGE
RESISTANT



DRIVER
SILICONE
PROTECTION



H35.000.Q1K

CCT SETTABLE



3000 K

4000 K

SDCM <6



MADE IN ITALY

LUCA HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV-ray stabilized.

***TETTO** realizzato in resina antiurto, stabilizzato ai raggi UV.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

***SOFFITTO** riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampana E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

***DIFFUSORE** in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

LUCA HIGH POWER LED

H35.000 *



Dimensions and weight

Height: 460 mm
Width: 350 mm
Depth: 305 mm
Weight: 4,2 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,089

Moulded colours:

Black White
Grey

Diffuser PMMA:

Clear Opal

HIGH POWER LED





Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	15 W	1690 lm	4000 K 3000 K	.R1K
	30 W	3620 lm	4000 K 3000 K	.Q1K
	50W	6550 lm	4000 K	.H1L
			3000 K	.H1R

PHOTOMETRIC DATA SAMPLE




LUCA E27 LED HIGH POWER 30W

POST height 3mt
10x10mt area: average 15 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

CCT SETTABLE LED LAMP











CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance. (15W and 30W only)

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LUCA

LARGE SIZE



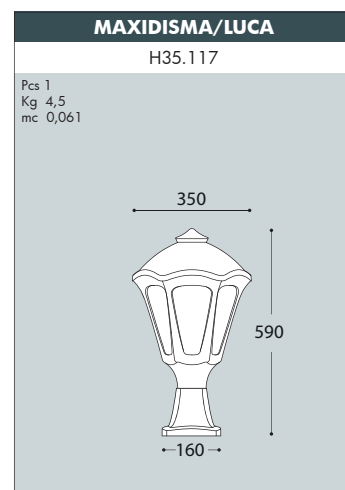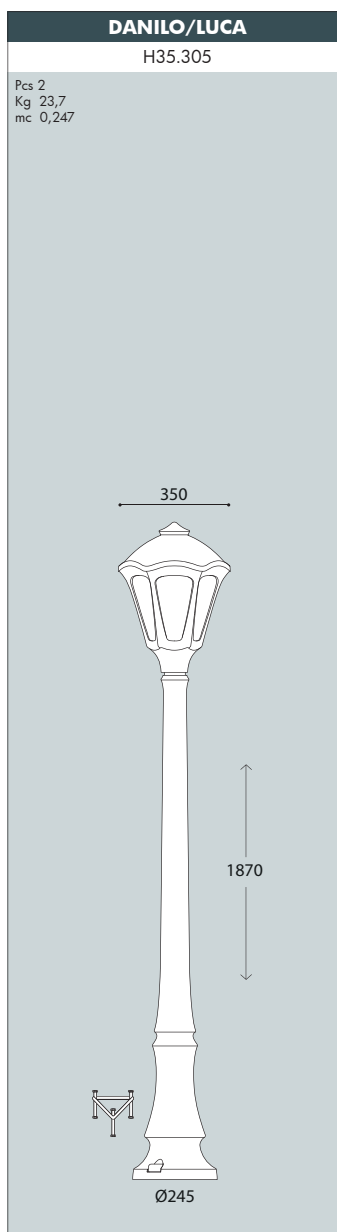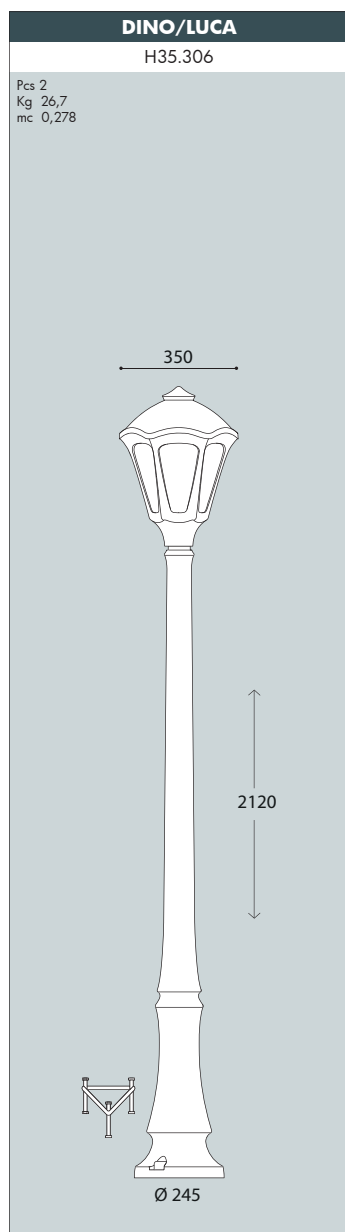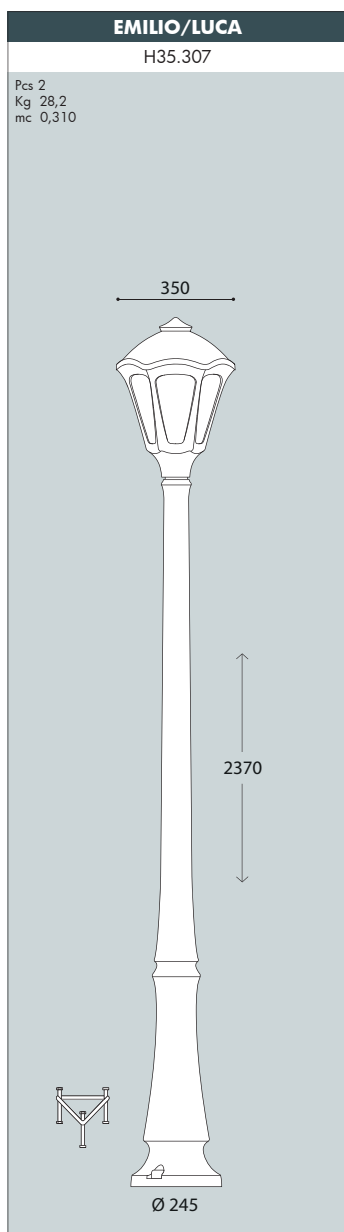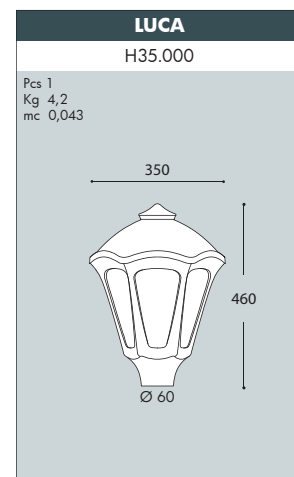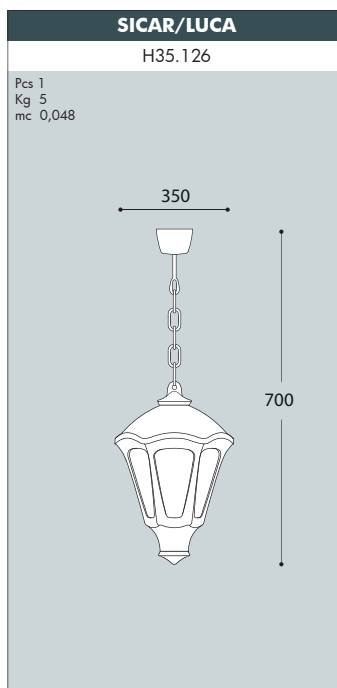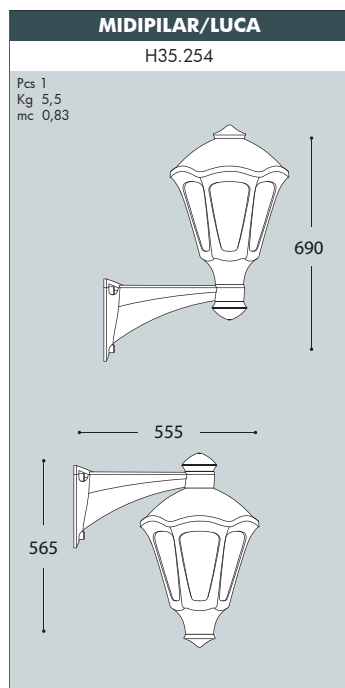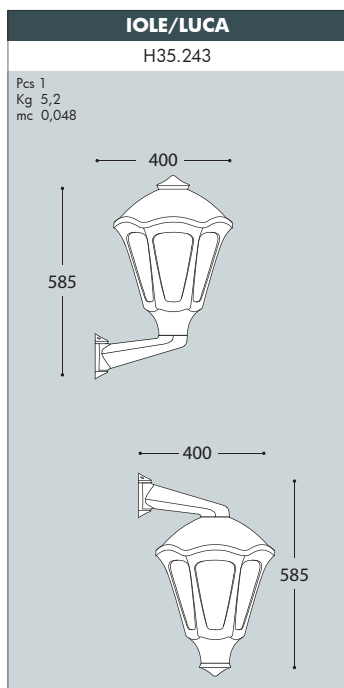

LUCA

LARGE SIZE





GIAMPY



SANDRO




LUCA

VANNI 2500 IOLE/LUCA 2L

H35.310.E20


Pcs 1
Kg 30,8
mc 0,268

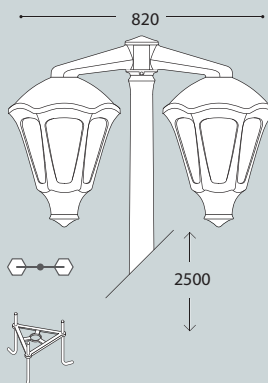

VANNI 2500 IOLE/LUCA 3L

H35.310.E30

Pcs 1
Kg 35
mc 0,342

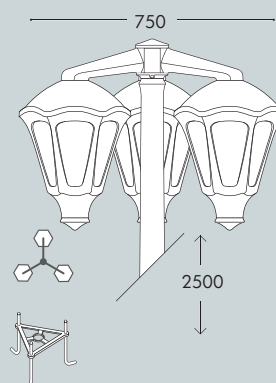


VANNI 2500/LUCA

H35.310

Pcs 1
Kg 25,2
mc 0,196

350




Ø 265

VANNI 2500 IOLE/LUCA 1L

H35.310.E10

Pcs 1
Kg 25,6
mc 0,233

550

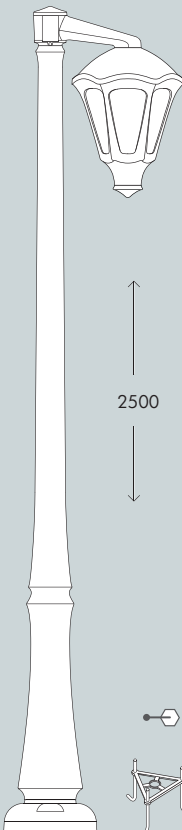


Ø 265

VANNI 2500 IOLE/LUCA 2L

H35.310.E20

Pcs 1
Kg 30,8
mc 0,268

820

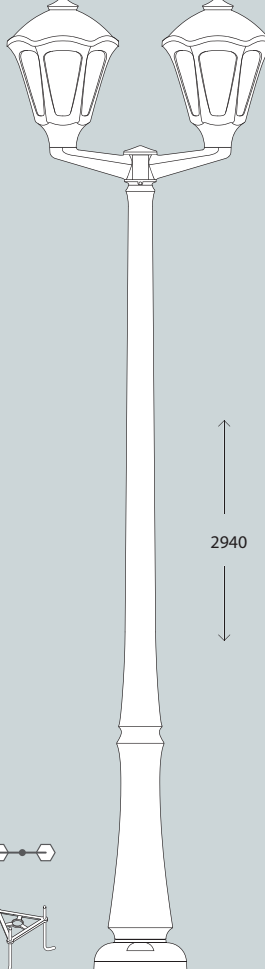


Ø 265

VANNI 2500 IOLE/LUCA 3L

H35.310.E30

Pcs 1
Kg 35
mc 0,342

750

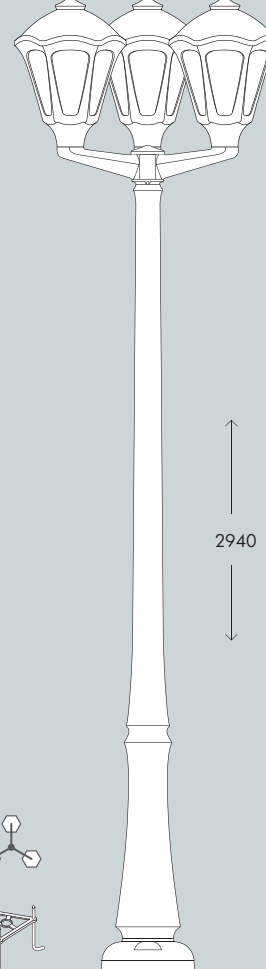

Ø 265

LUCA

LARGE SIZE





GIAMPY



SANDRO




LUCA

EKTOR 3000 IOLE/LUCA 2L

H35.364.E20


Pcs 1
Kg 40,7
mc 0,295

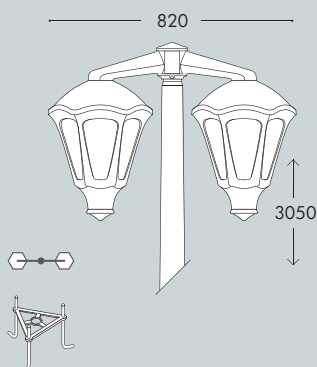

EKTOR 3000 IOLE/LUCA 3L

H35.364.E30


Pcs 1
Kg 45,3
mc 0,369

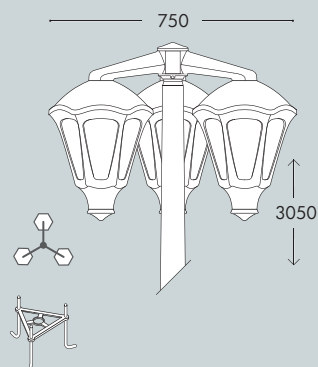

EKTOR 3000/LUCA

H35.364


Pcs 1
Kg 35,7
mc 0,223

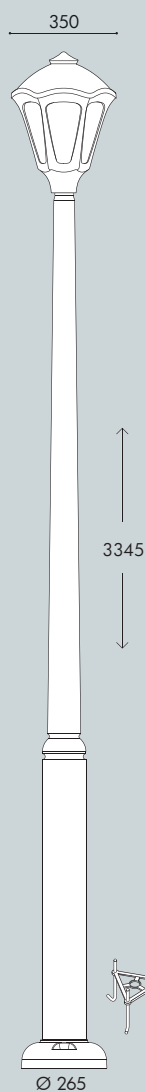

EKTOR 3000 IOLE/LUCA 1L

H35.364.E10


Pcs 1
Kg 36,1
mc 0,282

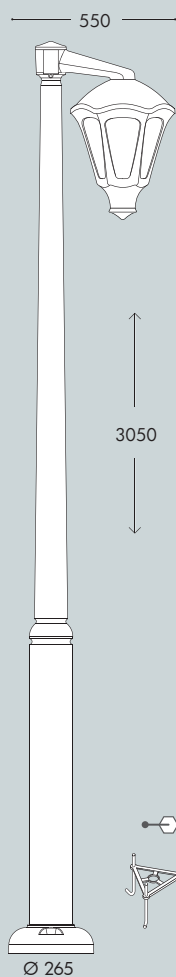

EKTOR 3000 IOLE/LUCA 2L

H35.364.E20


Pcs 1
Kg 40,7
mc 0,295

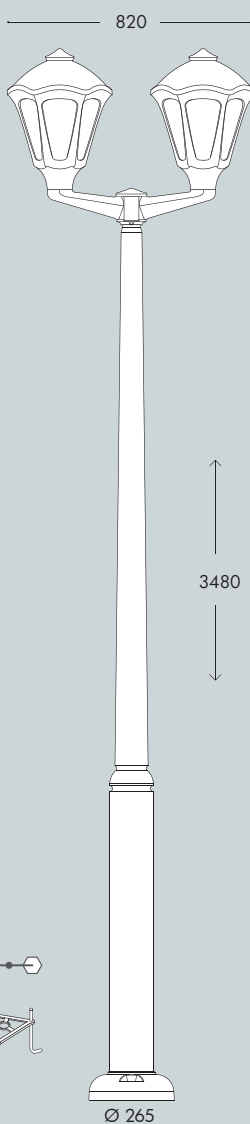

EKTOR 3000 IOLE/LUCA 3L

H35.364.E30

Pcs 1
Kg 45,3
mc 0,369

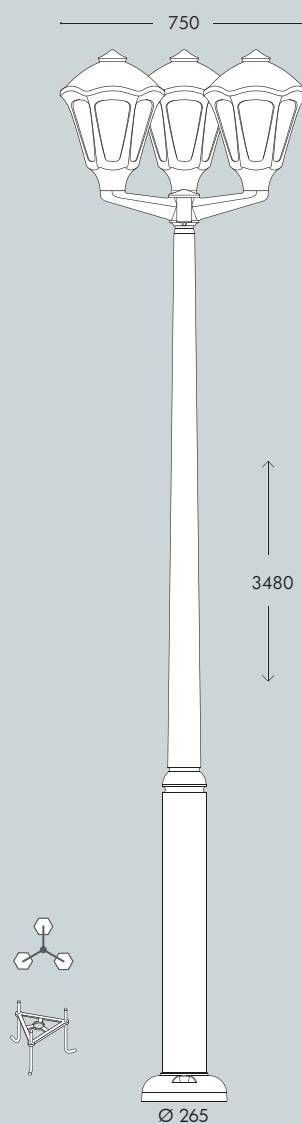

LUCA

LARGE SIZE









GIAMPY



SANDRO



LUCA

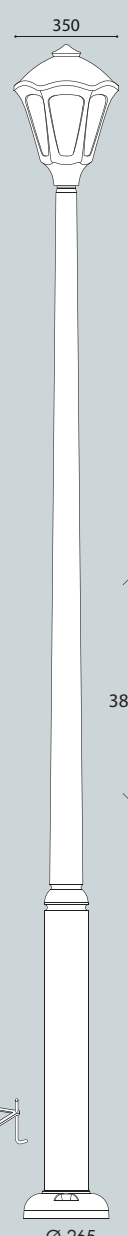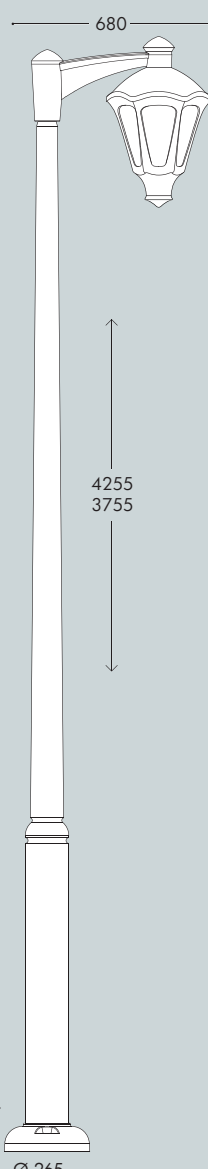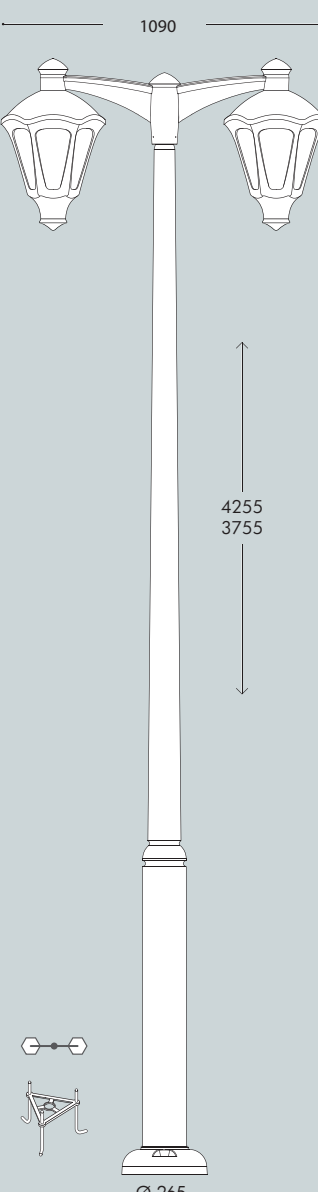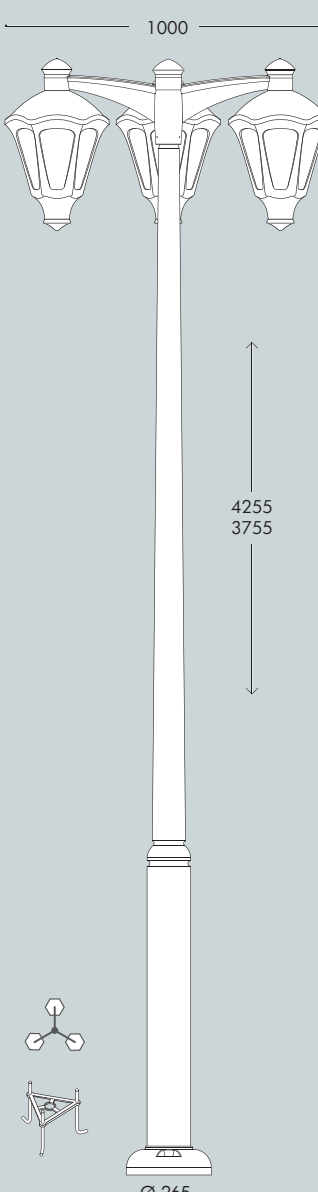EKTOR 3500/LUCA		EKTOR 4000 MIDIPILAR/LUCA 1L		EKTOR 4000 MIDIPILAR/LUCA 2L		EKTOR 4000 MIDIPILAR/LUCA 3L	
H35.367		H35.371.A10		H35.371.A20		H35.371.A30	
Pcs 1 Kg 39,3 mc 0,249		Pcs 1 Kg 45,1 mc 0,306		Pcs 1 Kg 50,3 mc 0,369		Pcs 1 Kg 50,3 mc 0,441	
EKTOR 3500 MIDIPILAR/LUCA 1L		EKTOR 3500 MIDIPILAR/LUCA 2L		EKTOR 3500 MIDIPILAR/LUCA 3L			
H35.367		H35.367.A10		H35.367.A20		H35.367.A30	
Pcs 1 Kg 40,3 mc 0,281		Pcs 1 Kg 43 mc 0,342		Pcs 1 Kg 55,5 mc 0,414			
 Ø 265		 Ø 265		 Ø 265		 Ø 265	