



TOP SELECTION PROJECT 2026

CLASSIC RANGE



REVIVAL RANGE



MODERN RANGE



E27 HIGH POWER LED

REVIVAL & CLASSIC RANGE



REVIVAL RANGE

NEW

CB
HCE CB
SCHEME



SERGIO
for details see pag. 10

CLASSIC RANGE

CB
HCE CB
SCHEME



NOEMI
for details see pag. 24

CB
HCE CB
SCHEME



TOBIA
for details see pag. 26

CB
HCE CB
SCHEME



ELIA
for details see pag. 30

NEW

CB
HCE CB
SCHEME



SERGIO
for details see pag. 12

CB
HCE CB
SCHEME



SILOE
for details see pag. 24



SIMON
for details see pag. 26

CB
HCE CB
SCHEME



PIETRO
for details see pag. 30

E27 HIGH POWER LED

MODERN RANGE




MODERN RANGE



E27 HIGH POWER LED




for details see pag. 71



NEW

T33.364.A10.Q1K



SERGIO


PAG 10

EKTOR 3000
MIDIPIILAR/SERGIO1L
for details see pag. 10

VANNI 2500
IOLE /SERGIO 2L
for details see pag. 10



T33.310.E20.Q1K



MADE IN ITALY

VANNI 2500/SERGIO
for details see pag. 10



T33.310.Q1K



MADE IN
ITALY

MAXIDISMA/SERGIO
for details see pag. 10



T33.117.Q1K

T33.254.Q1K



MIDIPIILAR/SERGIO
for details see pag. 10

MADE IN ITALY

fumagalli®
since 1973

IOLE/SERGIO
for details see pag. 10

T33.243.Q1K

ADVANTAGES



ANTI CORROSION

NO MAINTENANCE



UV-RAYS STABILIZED



DOUBLE INSULATION




NOT AFFECTED BY
CHEMICAL FERTILIZES



FULLY MODULAR
Ø60mm

RESIN POST OF A SINGLE PIECE WITHOUT JOINTS


Stronger, safer and more
durable

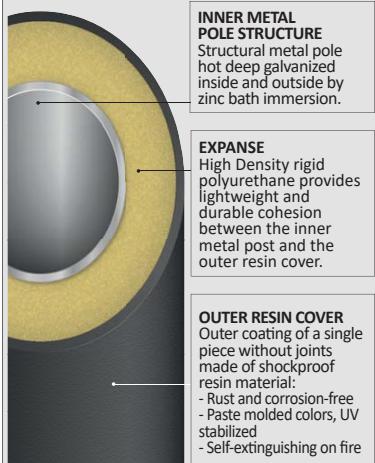

**INNER METAL
POLE STRUCTURE**
Structural metal pole
hot deep galvanized
inside and outside by
zinc bath immersion.

EXPANSE
High Density rigid
polyurethane provides
lightweight and
durable cohesion
between the inner
metal post and the
outer resin cover.


OUTER RESIN COVER
Outer coating of a single
piece without joints
made of shockproof
resin material:
- Rust and corrosion-free
- Paste molded colors, UV
stabilized
- Self-extinguishing on fire

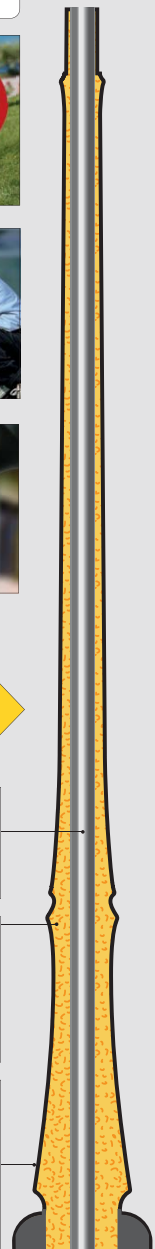

SINGLE LIGHTS




DIFFUSER

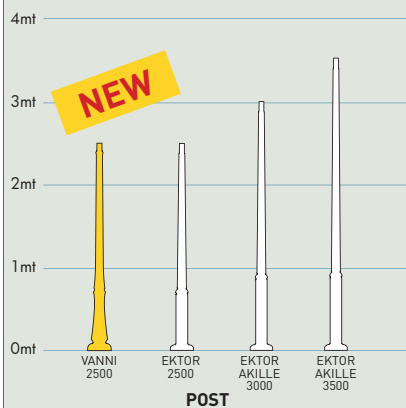


MULTI-HEAD LIGHTS



DIFFUSER

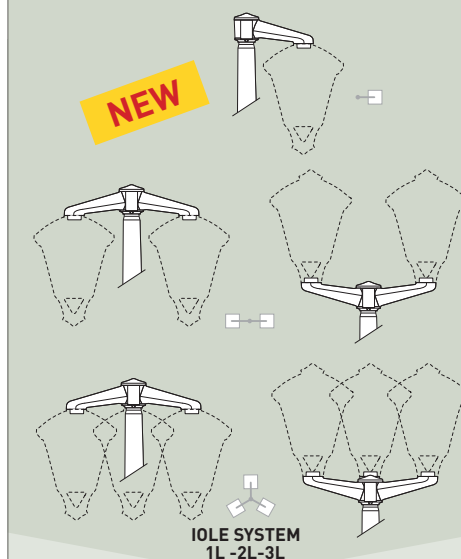

IOLE SYSTEM
1L - 2L - 3L

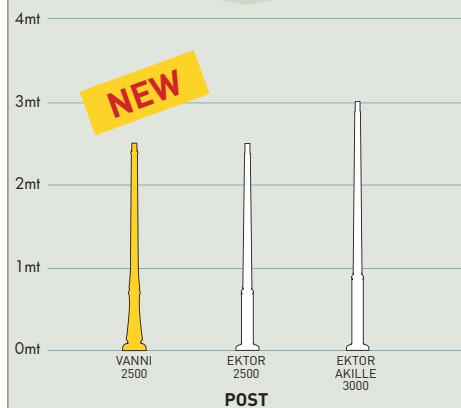


REVIVAL RANGE

SUGGESTED COMBINATIONS


MULTI-HEAD LIGHTS



DIFFUSER

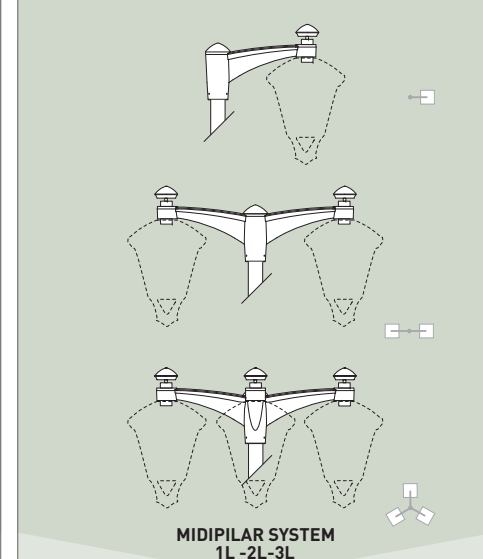

MIDIPIAR SYSTEM
1L - 2L - 3L

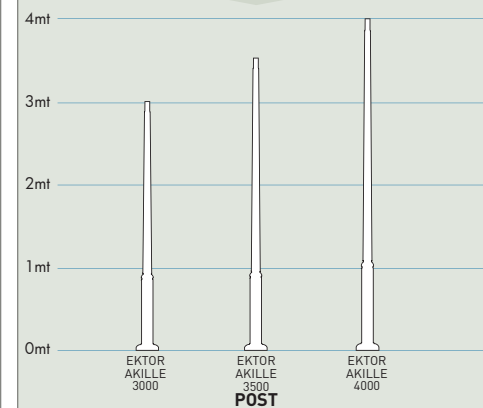

REVIVAL RANGE

CLASSIC RANGE

MODERN RANGE

SERGIO HIGH POWER LED



MADE IN ITALY



E27 HIGH POWER LED

INDOOR & OUTDOOR USE


+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 71




SERGIO 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
E27 HIGH POWER LED  Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K 	SERGIO HIQI-SON =  70W

SERGIO 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
E27 HIGH POWER LED  Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K/3000K 	SERGIO HIQI-SON =  100W



SERGIO HIGH POWER LED

30W LED		T33.000.Q1K
50W LED	4000K 	T33.000.H1L T33.000.H1R




SERGIO GX53 LED



MADE IN ITALY


FLAT
DIFFUSERGX53 LED VERSION
4x GX53GX53
LED

CCT SETTABLE



AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)



BLACK (A) GREY (L) WHITE (W)

DIFFUSER



CLEAR (X) OPAL (Y)



SERGIO 40W GX53 LED

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	4x10W 40W	5160 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	SERGIO = 100W HQL-SON


SERGIO GX53 LED-FLAT DIFFUSER

LAMP INCLUDED:
4x **GX53**
LED**CCT SET** LED
GX53 LAMP
INCLUDED4x10W
40W

T35.000.D4K



NEW

FLAT DIFFUSER
FOR GX53 LED
VERSION

POLES



EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

VANNI 2500

without door 000.310

VANNI 2500

BLACK (A) GREY (L) WHITE (W)

2500

NEW POST

Ø 60

2500

Ø 265

cage type C

EKTOR 2500

without door 000.361

with door 000.362


with door & box 000.363

Ø 60

2500

Ø 265

cage type C



	EKTOR 3000	AKILLE 3000	EKTOR 3500	AKILLE 3500	EKTOR 4000	AKILLE 4000
without door	000.364	000.414	000.367	000.417	000.371	000.421
with door	000.365	000.415	000.368	000.418	000.372	000.422
with door & box	000.366	000.416	000.369	000.419	000.373	000.423

Ø 60

3000

Ø 265

cage type C

Ø 60

3000

Ø 265

cage type C

Ø 60

3500

Ø 265

cage type C

Ø 60

3500

Ø 265

cage type C

Ø 60

4000

Ø 265

cage type D

Ø 60

4000

Ø 265

cage type D


WALL BRACKETS/BASE



POST TOP SYSTEM

IOLE WALL BRACKET

H.243.WAL




NEW

suitable for:
SERGIO

IOLE SYSTEM 1L

000.000.E10




Ø60

NEW

suitable for:
SERGIO

IOLE SYSTEM 2L

000.000.E20




Ø60

NEW

suitable for:
SERGIO

IOLE SYSTEM 3L

000.000.E30




Ø60

NEW

suitable for:
SERGIO


MIDIPIAR WALL BRACKET

H.254.WAL

suitable for:
SERGIO -
GINO 400 - REMO 400
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPIAR SYSTEM 1L

000.000.A10




Ø60

suitable for:
SERGIO -
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPIAR SYSTEM 2L

000.000.A20

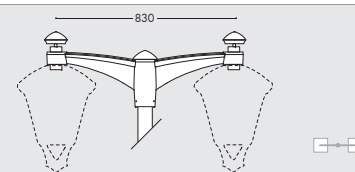


Ø60

suitable for:
SERGIO -
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPIAR SYSTEM 3L

000.000.A30



Ø60


suitable for:
SERGIO -
VIVI 400 - ECOVIVI 400
GLOBE 400

MAXIDISMA BASE

Ø60


suitable for:
SERGIO

H.117



175

180



Ø 60mm

FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.



NOEMI

PAG 24



SILOE

PAG 24



TOBIA

PAG 26



SIMON

PAG 26



ELIA

PAG 30



PIETRO

PAG 30



GLOBE

PAG 34



E35.201.R20.Q1K



NEBO OFIR/
NOEMI 2L
for details see pag. 24

Q43.207.H1L



HOREB/ELIA
for details see pag. 30

NEBO/TOBIA
for details see pag. 26

Q33.201.Q1K



3000



MADE IN
ITALY

U33.113.Q1K



LOT/SIMON
for details see pag. 26

OFIR/NOEMI
for details see pag. 24




E35.132.Q1K


ADVANTAGES



ANTI CORROSION



NO MAINTENANCE



UV-RAYS STABILIZED



DOUBLE INSULATION



NOT AFFECTED BY CHEMICAL FERTILIZERS



FULLY MODULAR
Ø60mm

RESIN POST OF A SINGLE PIECE WITHOUT JOINTS

Stronger, safer and more durable

INNER METAL POLE STRUCTURE
Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

EXPANSE
High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

OUTER RESIN COVER
Outer coating of a single piece without joints made of shockproof resin material:
- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire




CLASSIC RANGE



SUGGESTED COMBINATIONS




DIFFUSER





OFIR SYSTEM
2L - 3L

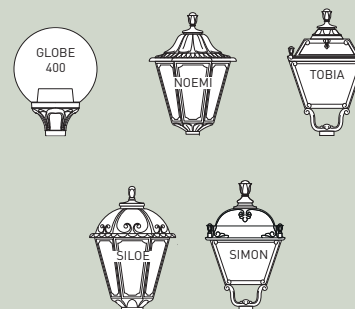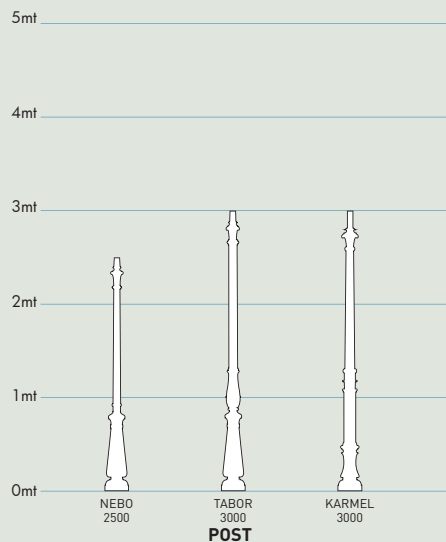


DIFFUSER




ADAM SYSTEM
2L - 3L

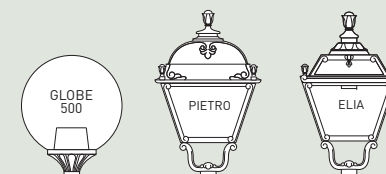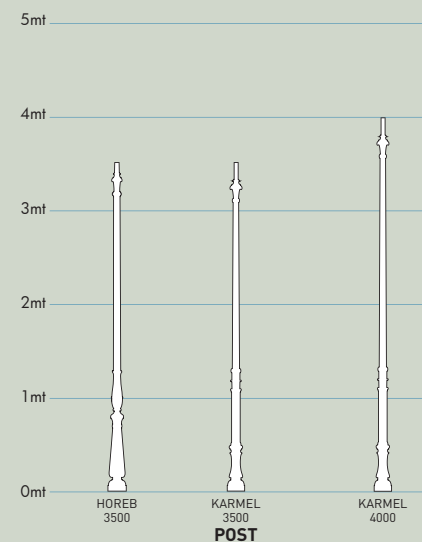

DIFFUSER

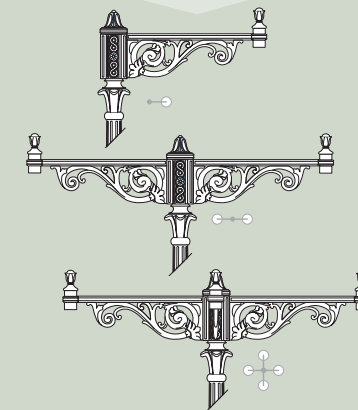

ARON SYSTEM
1L - 2L - 4L

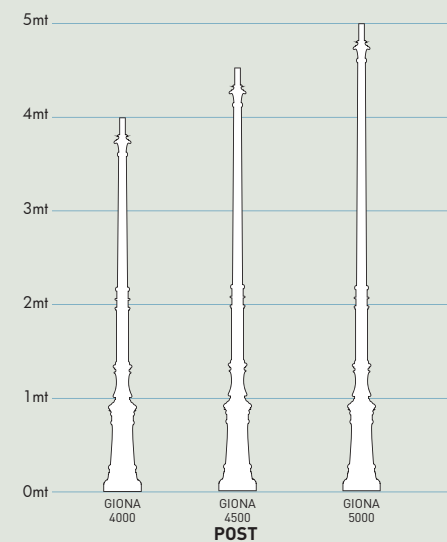

REVIVAL RANGE

CLASSIC RANGE

MODERN RANGE



MADE IN ITALY

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 71



AVAILABLE COLORS

RESIN BODY



DIFFUSER


BLACK (A)

WHITE (W)

CLEAR (X)

OPAL (Y)




NOEMI-SILOE 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
E27 HIGH POWER LED  Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K 	NOEMI-SILOE =  70W

NOEMI-SILOE 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	NOEMI-SILOE =  100W

NOEMI




30W LED		E35.000.Q1K
50W LED	4000K 	E35.000.H1L E35.000.H1R



SILOE



30W LED		K35.000.Q1K
50W LED	4000K 	K35.000.H1L K35.000.H1R



TOBIA/SIMON HIGH POWER LED



MADE IN ITALY

E27 HIGH POWER LED


INDOOR & OUTDOOR USE


+80°C
-30°C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 71



TOBIA-SIMON 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
E27 HIGH POWER LED  Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	TOBIA-SIMON =  70W HIGI-SON


TOBIA-SIMON 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	TOBIA-SIMON =  100W HIGI-SON



LAMP INCLUDED HIGH POWER LED E27

TOBIA

30W LED	CCT SET	Q33.000.Q1K
50W LED	4000K 3000K	Q33.000.H1L Q33.000.H1R






LAMP INCLUDED HIGH POWER LED E27

SIMON

30W LED	CCT SET	U33.000.Q1K
50W LED	4000K 3000K	U33.000.H1L U33.000.H1R



CLASSIC RANGE

TOBIA/SIMON GX53 LED



MADE IN ITALY

FLAT
DIFFUSER

GX53 LED VERSION
4x GX53



LED

CCT SETTABLE



AVAILABLE COLORS

RESIN BODY

DIFFUSER

BLACK (A)

WHITE (W)

CLEAR (X)

OPAL (Y)



TOBIA-SIMON 40W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	4x10W 40W	5160 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	TOBIA-SIMON = 100W HQI-SON

LAMP INCLUDED:
4x **GX53 LED**

TOBIA

CCT SET LED
GX53 LAMP INCLUDED

4x10W
40W

Q35.000.D4K

FLAT DIFFUSER
FOR GX53 LED
VERSION

520

Ø 60

LAMP INCLUDED:
4x **GX53 LED**

SIMON

CCT SET LED
GX53 LAMP INCLUDED

4x10W
40W

U35.000.D4K

FLAT DIFFUSER
FOR GX53 LED
VERSION

560

Ø 60

CLASSIC RANGE

ELIA/PIETRO HIGH POWER LED



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°
90% HUMIDITY
VOLTAGE SURGE RESISTANT

50W (6550 lm)
60W (7600 lm)

More details at page 71



AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)

BLACK (A)

WHITE (W)

DIFFUSER

CLEAR (X)

OPAL (Y)



UNTREATED

ANTI-SHOCK

RECYCLABLE

CE

CB IEC 60598-1

IP55

CLASS I

DOUBLE INSULATION

ELIA/PIETRO 50W HIGH POWER LED

LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOR TEMPERATURE	
E27 HIGH POWER LED Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	ELIA-PIETRO = 70W HQI-SON


ELIA/PIETRO 60W HIGH POWER LED

LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOR TEMPERATURE	
E27 HIGH POWER LED Ø 138	60W	7600 lm	100-240V 50/60 Hz	4000K 3000K	ELIA-PIETRO = 100W HQI-SON

ELIA




50W	4000K	Q43.000.H1L
	3000K	Q43.000.H1R
60W	4000K	Q43.000.W1L
	3000K	Q43.000.W1R



PIETRO



50W	4000K	U43.000.H1L
	3000K	U43.000.H1R
60W	4000K	U43.000.W1L
	3000K	U43.000.W1R



MADE IN ITALY

REVIVAL RANGE

CLASSIC RANGE

MODERN RANGE

ELIA/PIETRO GX53 LED



MADE IN ITALY



GX53 LED VERSION
8x GX53 LED

CCT SETTABLE
3000 K 4000 K 6500 K
SDCM <6

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



ELIA/PIETRO 80W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	8x10W 80W	10320 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	ELIA-PIETRO = 150W

ELIA

LAMP INCLUDED: 8x GX53 LED

LED GX53 LAMP INCLUDED CCT SET

8x10W **80W**

Q45.000.D8K

FLAT DIFFUSER FOR GX53 LED VERSION

PIETRO

LAMP INCLUDED: 8x GX53 LED

LED GX53 LAMP INCLUDED CCT SET

8x10W **80W**

U45.000.D8K

FLAT DIFFUSER FOR GX53 LED VERSION

GLOBE 400/GLOBE 500



MADE IN ITALY



AVAILABLE COLORS				
RESIN BODY (MOULDED COLOURS)		DIFFUSER		
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)




GLOBE 400

E27

G40.B40.E27

ALUMINIUM
CHROME
LOUVRE



GLOBE 500


E27

G50.B50.E27

E40

G50.B50.E40

ALUMINIUM
CHROME
LOUVRE




E27 VERSION
SUITABLE FOR
HQI - SON

POLES



EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

NEBO		TABOR		HOREB		KARMEL 3000		KARMEL 3500	
without door	000.201	without door	000.204	without door	000.207	without door	000.231	without door	000.234
with door	000.202	with door	000.205	with door	000.208	with door	000.232	with door	000.235
with door & box	000.203	with door & box	000.206	with door & box	000.209	with door & box	000.233	with door & box	000.236

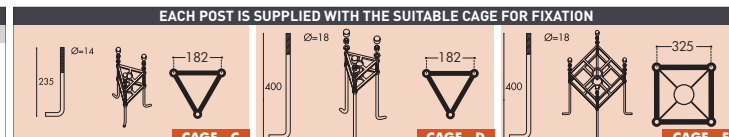

KARMEL 4000		GIONA 4000		GIONA 4500		GIONA 5000	
without door	000.237	without door	000.221	without door	000.224	without door	000.227
with door	000.238	with door	000.222	with door	000.225	with door	000.228
with door & box	000.239	with door & box	000.223	with door & box	000.226	with door & box	000.229


WALL BRACKETS/BASE



POST TOP SYSTEMS

OFIR WALL BRACKET

H.132.WAL



suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400


Ø 60mm

FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

ADAM WALL BRACKET


H.171.WAL



suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

LOT BASE


H.113



suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
ELIA - PIETRO
GLOBE 400-500

ARON WALL BRACKET


H.172 + H.172.WAL

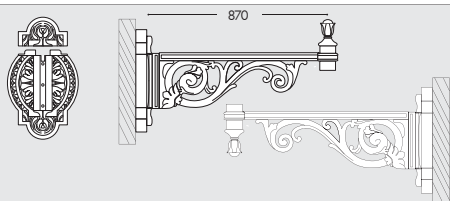

suggested diffuser:
ELIA - PIETRO
GLOBE 500

ARON SYSTEM 1L


000.000.N10



suggested diffuser:
ELIA - PIETRO
GLOBE 500

OFIR SYSTEM 2L


000.000.R20



suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

OFIR SYSTEM 3L


000.000.R30



suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

ADAM SYSTEM 2L


000.000.M20



suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

ADAM SYSTEM 3L


000.000.M30



suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

ARON SYSTEM 2L


000.000.N20

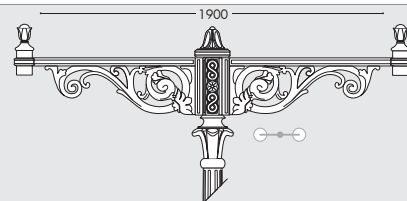

suggested diffuser:
ELIA - PIETRO
GLOBE 500

ARON SYSTEM 4L

000.000.N40

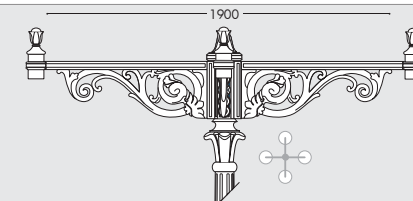

suggested diffuser:
ELIA - PIETRO
GLOBE 500



GIORGIO

GIORGIO PAG 46
ROSA PAG 46



GINO

GINO400 PAG 52
GINO500 PAG 58



REMO

REMO400 PAG 52
REMO500 PAG 58



VIVI

VIVI400 PAG 48
VIVI500 PAG 54



ECOVIVI

ECOVIVI400 PAG 50
ECOVIVI500 PAG 56



BEPPE

BEPPE400 PAG 48
BEPPE500 PAG 54



ECOBEPPE

ECOBEPPE400 PAG 50
ECOBEPPE500 PAG 56




GLOBE

GLOBE400 PAG 60
GLOBE500 PAG 60



**EKTOR 3000
MIDIPILAR/
VIVI 400 1L**
for details see pag. 48



3255

V50.364.A10.Q1K

P50.361.Q1K

**EKTOR 2500/
BEPPE 400**
for details see pag. 48



3065

**EKTOR 2500/
GIORGIO**
for details see pag. 46

4P2.361.G10.E28

2700



R50.254.Q1K

**MIDIPILAR/
REMO 400**
for details see pag. 52

F50.115.Q1K

**NEW LOT/
GINO 400**
for details see pag. 52

ADVANTAGES



ANTI CORROSION



NO MAINTENANCE




UV-RAYS STABILIZED



DOUBLE INSULATION




NOT AFFECTED BY
CHEMICAL FERTILIZERS




FULLY MODULAR
Ø60mm

SINGLE LIGHT

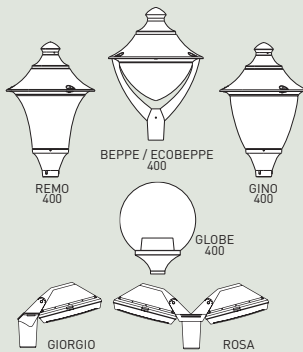


DIFFUSER

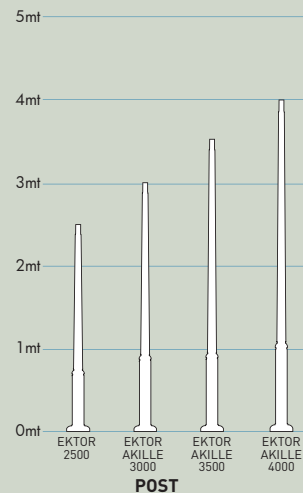


POST

SINGLE LIGHT

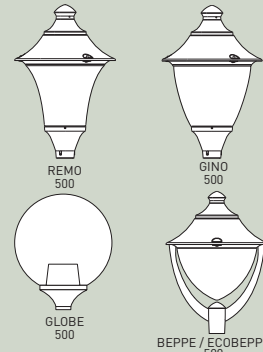


DIFFUSER

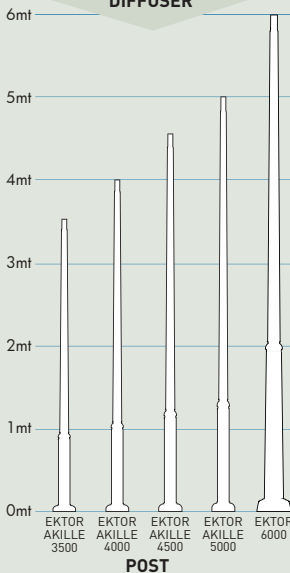

POST

RESIN POST OF A SINGLE PIECE WITHOUT JOINTS

Stronger, safer and more durable



INNER METAL POLE STRUCTURE
Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

EXPANSE
High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

OUTER RESIN COVER
Outer coating of a single piece without joints made of shockproof resin material:
- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire




MODERN RANGE

SUGGESTED COMBINATIONS


MULTI-HEAD LIGHTS



DIFFUSER

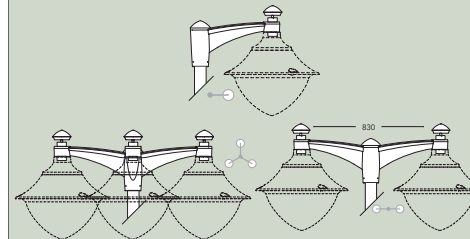

MIDIPILAR
1L - 2L - 3L

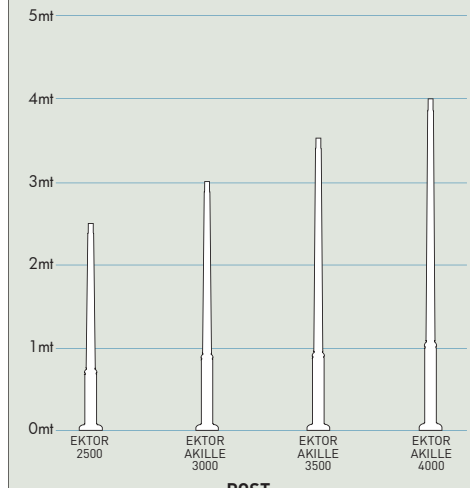


POST


MULTI-HEAD LIGHTS



DIFFUSER

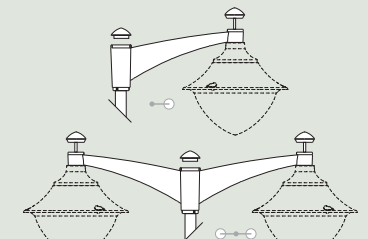

PILAR
1L - 2L

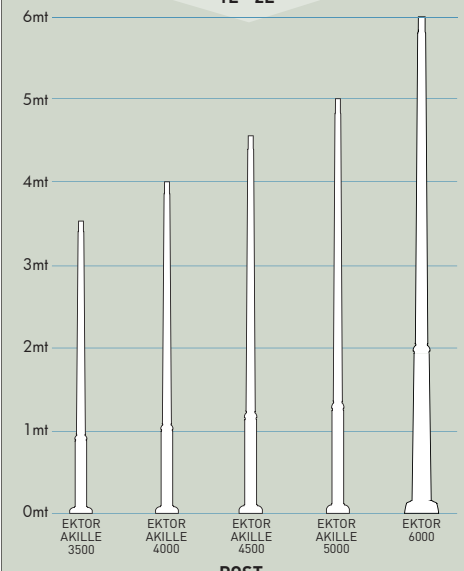

POST

REVIVAL RANGE

CLASSIC RANGE

MODERN RANGE



MADE IN ITALY



CCT SETTABLE

3000 K 4000 K 6500 K

SDCM < 6

GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)

BLACK (A) GREY (L) WHITE (W)

DIFFUSER

OPAL (Y)

AVAILABLE VERSIONS

NEW GX53 LED **NEW VERSION**

4x GX53

2x E27



GIORGIO/ROSA 4 x GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	4x10W 40W	5160 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	GIORGIO-ROSA 100W HQI-SON

NEW LED BULKHEAD GX53-CCT & WATT SETTABLE					
LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
	15W eco mode 9W	1940 lm 1300 lm	100-240V 50/60 Hz	4000K/2700K CCT SET	≈150W INCANDESCENT ≈100W INCANDESCENT

GIORGIO **2xE27**

LAMP INCLUDED: **4x GX53 LED**

2xE27 4P2.000.G10.E28

4x10W 40W **CCT SET** 4P2.000.G10.D4K

GX53 LED 15W **WATT SET** 4P1.000.G10.E1P **NEW VERSION**

Dimensions: 420, 153, 300, Ø60

ROSA **2xE27**

LAMP INCLUDED: **8x GX53 LED**

2xE27 4P2.000.G20.E28

2x40W 80W **CCT SET** 4P2.000.G20.D4K

GX53 LED 2x15W 30W **WATT SET** 4P1.000.G20.E1P **NEW VERSION**

Dimensions: 700, 153, 300, Ø60

MADE IN ITALY

VIVI/BEPPE 400



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C
90% HUMIDITY
VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 71



AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)

BLACK (A) GREY (L) WHITE (W)



DIFFUSER

CLEAR (X) OPAL (Y)



VIVI/BEPPE 400 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	6x10W 60W	7740 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	VIVI-BEPPE 400 = 100W HQI-SO

VIVI/BEPPE 400 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOR TEMPERATURE	
	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	VIVI-BEPPE 400 = 50W HQI-SO
	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 400 = 70W HQI-SO

GX53 LED

LAMP INCLUDED:
6x GX53
LED

VIVI 400

HIGH POWER LED

30W CCT SET V50.000.Q1K

4000K V50.000.H1L

3000K V50.000.H1R

6x10W 60W CCT SET V50.000.D6K

LAMP INCLUDED:
HIGH POWER
LED E27

GX53 LED

LAMP INCLUDED:
6x GX53
LED

BEPPE 400

HIGH POWER LED

30W CCT SET P50.000.Q1K

4000K P50.000.H1L

3000K P50.000.H1R

6x10W 60W CCT SET P50.000.D6K

LAMP INCLUDED:
HIGH POWER
LED E27

ECOVIVI/ECOBEPPE 400



MADE IN ITALY



CCT SETTABLE

3000 K 4000 K 6500 K

SDCM < 6

GX53 MODULAR LED LIGHT SYSTEM



- Cost saving:** long-life and efficient LED light sources
- Built-in driver:** quick and easy lamp replacement
- Great flexibility:** GX53 standard lamp holder
- Future-proofed luminaries:** performances easy to upgrade to latest technology developments

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)			DIFFUSER
BLACK (A)	GREY (I)	WHITE (W)	CLEAR (X)



ECOVIVI/ECOBEPPE 400 60W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	6x10W 60W	7740 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	ECOVIVI- ECOBEPPE 400 = 100W

ECOVIVI 400 **E27**

LAMP INCLUDED: 6x **GX53 LED**

E27 EV4.000.E27

E40 EV4.000.E40

6x10W **60W** **CCT SET** EV4.000.D6K

Ø 60

480

243

E27 VERSION
SUITABLE FOR **HQI - SON**

ECOBEPPE 400 **E27**

LAMP INCLUDED: 6x **GX53 LED**

E27 EP5.000.E27

E40 EP5.000.E40

6x10W **60W** **CCT SET** EP5.000.D6K

Ø 60

480

680

E27 VERSION
SUITABLE FOR **HQI - SON**

GINO/REMO 400



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C
90% HUMIDITY
VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 71



AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)

BLACK (A) GREY (L) WHITE (W)



DIFFUSER

CLEAR (X) OPAL (Y)



GINO/REMO 400 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	6x10W 60W	7740 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	GINO-REMO 400 = 100W HID-SON

GINO/REMO 400 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOR TEMPERATURE	
	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	GINO-REMO 400 = 50W HID-SON
	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	GINO-REMO 400 = 70W HID-SON

GX53 LED

LAMP INCLUDED:
6x GX53 LED

GINO 400

HIGH POWER LED

30W CCT SET F50.000.Q1K

4000K F50.000.H1L

50W 3000K F50.000.H1R

6x10W 60W CCT SET F50.000.D6K

LAMP INCLUDED:
HIGH POWER LED E27

GX53 LED

LAMP INCLUDED:
6x GX53 LED

REMO 400

HIGH POWER LED

30W CCT SET R50.000.Q1K

4000K R50.000.H1L

50W 3000K R50.000.H1R

6x10W 60W CCT SET R50.000.D6K

LAMP INCLUDED:
HIGH POWER LED E27

VIVI/BEPPE 500



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C
90% HUMIDITY
VOLTAGE SURGE RESISTANT

50W (6550 lm)
60W (7600 lm)

More details at page 71



AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)

BLACK (A) GREY (I) WHITE (W)



DIFFUSER

CLEAR (X) OPAL (Y)




VIVI/BEPPE 500 GX53 LED						VIVI/BEPPE 500 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE		LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOR TEMPERATURE	
	9x10W 90W	11610lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	VIVI-BEPPE 500 = 150W HCB-SON		50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 500 = 70W HCB-SON
											VIVI-BEPPE 500 = 100W HCB-SON
							60W	7600 lm	100-240V 50/60 Hz	4000K 3000K	

GX53 LED

LAMP INCLUDED:
9x **GX53**
LED

VIVI 500

50W	4000K	V60.000.H1L
	3000K	V60.000.H1R
60W	4000K	V60.000.W1L
	3000K	V60.000.W1R
9x10W 90W	CCT SET	V60.000.D9K



HIGH POWER LED


LAMP INCLUDED:
HIGH POWER
LED E27

GX53 LED

LAMP INCLUDED:
9x **GX53**
LED

BEPPE 500


50W	4000K	P60.000.H1L
	3000K	P60.000.H1R
60W	4000K	P60.000.W1L
	3000K	P60.000.W1R
9x10W 90W	CCT SET	P60.000.D9K



HIGH POWER LED

LAMP INCLUDED:
HIGH POWER
LED E27

ECOVIVI/ECOBEPPE 500



MADE IN ITALY



CCT SETTABLE

3000 K 4000 K 6500 K

SDCM < 6

GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)			DIFFUSER
BLACK (A)	GREY (I)	WHITE (W)	CLEAR (X)



ECOVIVI/ECOBEPPE 500 90W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	9x10W 90W	11610 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	ECOVIVI - ECOBEPPE 500 150W

GX53 LED
LAMP INCLUDED:
9x GX53 LED

ECOVIVI 500 E27

E27	EV6.000.E27
E40	EV6.000.E40
9x10W 90W	CCT SET EV6.000.D9K

E27 VERSION
SUITABLE FOR
 HQI - SON

GX53 LED
LAMP INCLUDED:
9x GX53 LED

ECOBEPPE 500 E27

E27	EP6.000.E27
E40	EP6.000.E40
9x10W 90W	CCT SET EP6.000.D9K

E27 VERSION
SUITABLE FOR
 HQI - SON

GINO/REMO 500



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C
90% HUMIDITY
VOLTAGE SURGE RESISTANT

50W (6550 lm)
60W (7600 lm)

More details at page 71



AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)

BLACK (A) GREY (L) WHITE (W)



DIFFUSER

CLEAR (X) OPAL (Y)



GINO/REMO 500 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	9x10W 90W	11610 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	GINO-REMO 500 = 148W HQS-SON

GINO/REMO 500 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CLOUR TEMPERATURE	
	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	GINO-REMO 500 = 70W HQS-SON
	60W	7600 lm	100-240V 50/60 Hz	4000K 3000K	GINO-REMO 500 = 100W HQS-SON

GX53 LED


LAMP INCLUDED:
9x **GX53**
LED

50W 4000K 3000K

60W 4000K 3000K

9x10W **90W** **CCT SET**

F60.000.H1L
F60.000.H1R
F60.000.W1L
F60.000.W1R
F60.000.D9K



HIGH POWER LED

LAMP INCLUDED:
HIGH POWER
LED E27

50W 4000K 3000K

60W 4000K 3000K

9x10W **90W** **CCT SET**

F60.000.H1L
F60.000.H1R
F60.000.W1L
F60.000.W1R
F60.000.D9K



GX53 LED


LAMP INCLUDED:
9x **GX53**
LED

50W 4000K 3000K

60W 4000K 3000K

9x10W **90W** **CCT SET**

R60.000.H1L
R60.000.H1R
R60.000.W1L
R60.000.W1R
R60.000.D9K



HIGH POWER LED

LAMP INCLUDED:
HIGH POWER
LED E27

50W 4000K 3000K

60W 4000K 3000K

9x10W **90W** **CCT SET**

R60.000.H1L
R60.000.H1R
R60.000.W1L
R60.000.W1R
R60.000.D9K



MODERN RANGE

GLOBE 400/GLOBE 500



MADE IN ITALY



AVAILABLE COLORS					
RESIN BODY (MOULDED COLOURS)			DIFFUSER		
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)




GLOBE 400

E27

G41.B40.E27

ALUMINIUM
CHROME
LOUVRE



GLOBE 500


E27

G51.B50.E27

E40

G51.B50.E40

ALUMINIUM
CHROME
LOUVRE



E27 VERSION
SUITABLE FOR
HQI - SON


MADE IN ITALY

POLES





EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION


EKTOR 2500		EKTOR 3000		AKILLE 3000		EKTOR 3500		AKILLE 3500	
without door	000.361	without door	000.364	without door	000.414	without door	000.367	without door	000.417
with door	000.362	with door	000.365	with door	000.415	with door	000.368	with door	000.418
with door & box	000.363	with door & box	000.366	with door & box	000.416	with door & box	000.369	with door & box	000.419

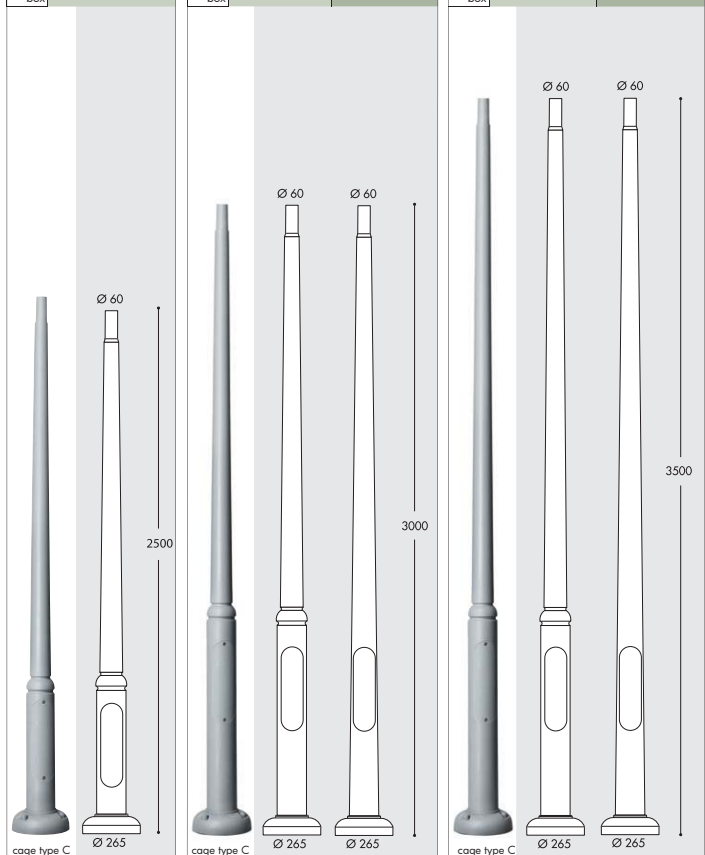


EKTOR 4000		AKILLE 4000	
without door	000.371	without door	000.421
with door	000.372	with door	000.422
with door & box	000.373	with door & box	000.423

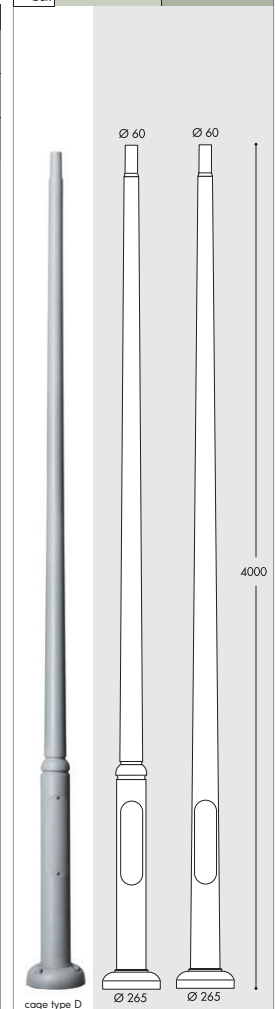

EKTOR 4500		AKILLE 4500		EKTOR 5000		AKILLE 5000	
without door	000.374	without door	000.424	without door	000.377	without door	000.427
with door	000.375	with door	000.425	with door	000.378	with door	000.428
with door & box	000.376	with door & box	000.426	with door & box	000.379	with door & box	000.429

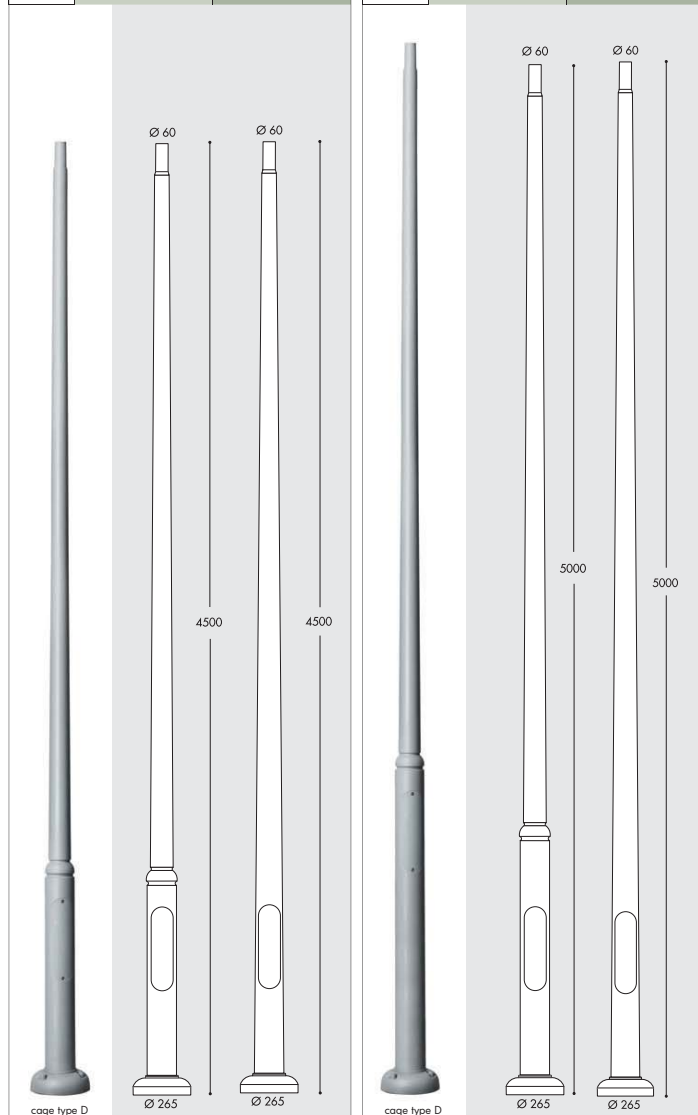

EKTOR 6000	
without door	000.384
with door	000.385
with door & box	000.386

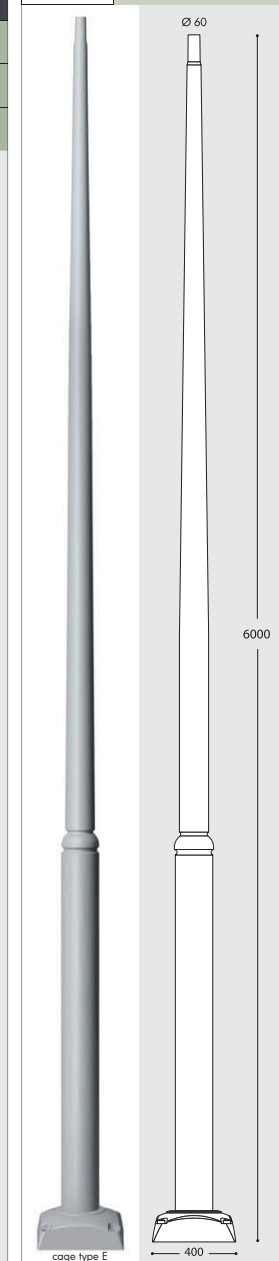


WALL BRACKETS/BASE



POST TOP SYSTEM

MIDIPILAR WALL BRACKET


H.254.WAL



suitable for:
GINO 400 - REMO 400
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 1L

000.000.A10




Ø60

suitable for:
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 2L

000.000.A20




Ø60

suitable for:
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 3L

000.000.A30




Ø60

suitable for:
VIVI 400 - ECOVIVI 400
GLOBE 400

PILAR WALL BRACKET


H.253.WAL

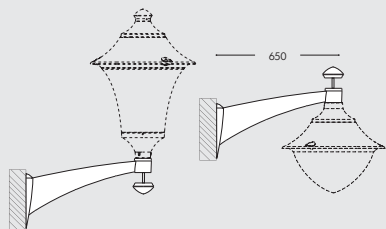

suitable for:
GINO 500 - REMO 500
VIVI 500 - ECOVIVI 500
BEPPE 500 - GLOBE 500

PILAR SYSTEM 1L

000.000.P10




Ø60

suitable for:
VIVI 500 - ECOVIVI 500
GLOBE 500

PILAR SYSTEM 2L

000.000.P20



Ø60

suitable for:
VIVI 500 - ECOVIVI 500
GLOBE 500


NEW LOT BASE

H.115

Ø60



suitable for:
GINO 400 - REMO 400
VIVI 400 - ECOVIVI 400
BEPPE 400 - ECOBEPPE 400
GLOBE 400 - GINO 500
REMO 500 - VIVI 500
ECOVIVI 500 - GLOBE 500



Ø 60mm

FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

LUIGI HIGH-BAY



LUIGI 500-DR

LUIGI 500

LUIGI 400-DR


LUIGI 400



MADE IN ITALY



CCT SETTABLE



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C
90% HUMIDITY
VOLTAGE SURGE RESISTANT

50W (6550 lm)
60W (7600 lm)

More details at page 71



GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)



DIFFUSER




HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOR TEMPERATURE	
E27 HIGH POWER LED Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	LUIGI 400 = 50W HQI - SON
E27 HIGH POWER LED Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	LUIGI 400-LUIGI 500 = 70W HQI - SON
E27 HIGH POWER LED Ø 138	60W	7600 lm	100-240V 50/60 Hz	4000K 3000K	LUIGI 500 = 100W HQI - SON

GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Ø TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53	6x10W 60W	7740 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	LUIGI 400 = 100W HQI - SON
GX53	9x10W 90W	11610 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	LUIGI 500 = 150W HQI - SON


LUIGI 500-DR HIGH POWER LED



- 50W LED 4000K L51.128.H1L
- 50W LED 3000K L51.128.H1R
- 60W LED 4000K L51.128.W1L
- 60W LED 3000K L51.128.W1R



9x10W CCT SET 90W L5F.128.D9K




LUIGI 500 GX53 LED




LUIGI 400-DR HIGH POWER LED



- 30W LED 4000K L41.128.Q1K
- 50W LED 4000K L41.128.H1L
- 50W LED 3000K L41.128.H1R



6x10W CCT SET 60W L4F.128.D6K




LUIGI 400 GX53 LED





TÜV CERTIFIED LED MODULES



TÜV CERTIFIED LED MODULES

G9LED			
 VOLTAGE 100-240V	 INDOOR & OUTDOOR USE -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT	POWER	1,7 W
		LUMINOUS FLUX (Φ TOTAL)	3000 K 150 lm 4000 K 150 lm
		SIZE & SOCKET	
 CE LVD CB EMC ERP  COMPLY WITH: EU 2019/2015 EU 2019/2020	 COMPLY WITH: EU 2019/2015 EU 2019/2020	VOLTAGE	100-240 V
		FREQUENCY	50/60 Hz
		PSTLM (NO FLICKER)	<1
		SVM	0,9
		CRI	> 80
		SDCM	<6
		SWITCHING CYCLE	>40.000
		WARM UP TIME	≤ 0,5"
		LIFETIME	15.000 h
		KELVIN	3000 K 4000 K
		EFFICIENCY CLASS	F
		REF. CODE	H.LED.G09.3K H.LED.G09.4K

R7s LED 78mm- CCT SETTABLE			
 VOLTAGE 100-240V	 INDOOR & OUTDOOR USE -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT	POWER	3,5W
		LUMINOUS FLUX (Φ TOTAL)	2700 K 325 lm 4000 K 365 lm 6500 K 365 lm
		SIZE & SOCKET	
 CE LVD CB EMC ERP  COMPLY WITH: EU 2019/2015 EU 2019/2020	 COMPLY WITH: EU 2019/2015 EU 2019/2020	VOLTAGE	100-240 V
		FREQUENCY	50/60 Hz
		DISPLACEMENT FACTOR	>0
		PSTLM (NO FLICKER)	<1
		SVM	0,4
		CRI	> 80
		SDCM	<6
		SWITCHING CYCLE	45.000
		WARM UP TIME	≤ 0,5"
		LIFETIME	25.000 h
		EFFICIENCY CLASS	F
		REF. CODE	H7.LED.R7S.CCT

GU10 LED - CCT SETTABLE			
 VOLTAGE 100-240V	 INDOOR & OUTDOOR USE -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT	POWER	2,9 W 4,8 W
		LUMINOUS FLUX (Φ TOTAL)	2700 K 360 lm 4000 K 390 lm 580 lm 625 lm
		SIZE & SOCKET	
 CE LVD CB EMC ERP  COMPLY WITH: EU 2019/2015 EU 2019/2020	 COMPLY WITH: EU 2019/2015 EU 2019/2020	VOLTAGE	100-240 V
		FREQUENCY	50/60 Hz
		DISPLACEMENT FACTOR	>0,95
		PSTLM (NO FLICKER)	<1
		SVM	0,4
		CRI	> 80
		SDCM	<5
		SWITCHING CYCLE	> 25.000
		WARM UP TIME	≤ 0,5"
		LIFETIME	25.000 h
		EFFICIENCY CLASS	E
		REF. CODE	H.LED.GU10.CCT H2.LED.GU10.CCT

R7s LED 118mm- CCT SETTABLE			
 VOLTAGE 100-240V	 INDOOR & OUTDOOR USE -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT	POWER	7,5 W
		LUMINOUS FLUX (Φ TOTAL)	2700 K 680 lm 4000 K 775 lm 6500 K 790 lm
		SIZE & SOCKET	
 CE LVD CB EMC ERP  COMPLY WITH: EU 2019/2015 EU 2019/2020	 COMPLY WITH: EU 2019/2015 EU 2019/2020	VOLTAGE	100-240 V
		FREQUENCY	50/60 Hz
		DISPLACEMENT FACTOR	>0,5
		PSTLM (NO FLICKER)	<1
		SVM	0,4
		CRI	> 80
		SDCM	<6
		SWITCHING CYCLE	45.000
		WARM UP TIME	≤ 0,5"
		LIFETIME	25.000 h
		EFFICIENCY CLASS	F
		REF. CODE	H8.LED.R7S.CCT

R7s LED 189mm- CCT SETTABLE			
 VOLTAGE 100-240V	 INDOOR & OUTDOOR USE -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT	POWER	10,5 W
		LUMINOUS FLUX (Φ TOTAL)	2700 K 1000 lm 4000 K 1130 lm 6500 K 1060 lm
		SIZE & SOCKET	
 CE LVD CB EMC ERP  COMPLY WITH: EU 2019/2015 EU 2019/2020	 COMPLY WITH: EU 2019/2015 EU 2019/2020	VOLTAGE	100-240 V
		FREQUENCY	50/60 Hz
		DISPLACEMENT FACTOR	>0,7
		PSTLM (NO FLICKER)	<1
		SVM	0,4
		CRI	> 80
		SDCM	<6
		SWITCHING CYCLE	45.000
		WARM UP TIME	≤ 0,5"
		LIFETIME	25.000 h
		EFFICIENCY CLASS	F
		REF. CODE	H9.LED.R7S.CCT

TÜV CERTIFIED LED MODULES



TÜV CERTIFIED LED MODULES

E27 LED A60- CCT SETTABLE

VOLTAGE
100-240V

CCT SETTABLE
2700 K 4000 K 4500 K

ENERGY+
FUMAGALLI S.R.L.
H.LED.A60.CCT

CE LVD
CB EMC
ERP

INDOOR & OUTDOOR USE
-30 +80 °C 90% HUMIDITY
VOLTAGE SURGE RESISTANT

COMPLY WITH:
EU 2019/2015
EU 2019/2020

IECEE CB CERTIFICATE:
SG PSB-LE-03297

POWER	8,5 W	11 W
LUMINOUS FLUX (Φ TOTAL)	2700 K 840 lm 4000 K 920 lm 4500 K 920 lm	1100 lm 1200 lm 1200 lm
SIZE & SOCKET	 Ø60 110 E27 86% savings ~6W	 Ø60 120 E27 85% savings ~7.5W
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR	>0,5	>0,7
PSTLM (NO FLICKER)	< 1	< 1
SVM	0,4	0,4
CRI	> 80	> 80
SDCM	<6	<6
LIFETIME	25.000 h	25.000 h
EFFICIENCY CLASS	F	F
REF. CODE	H.LED.A60.CCT	H2.LED.A60.CCT

*SASO version available upon request.

E27 LED FILAMENT A60

VOLTAGE
100-240V

ENERGY+
FUMAGALLI S.R.L.
H.LED.FIL.3K

CE LVD
CB EMC
ERP

INDOOR & OUTDOOR USE
-30 +80 °C 90% HUMIDITY
VOLTAGE SURGE RESISTANT

COMPLY WITH:
EU 2019/2015
EU 2019/2020

IECEE CB CERTIFICATE:
SG PSB-LE-03735

POWER	6,5 W
LUMINOUS FLUX (Φ TOTAL)	2700 K 800 lm
SIZE & SOCKET	 Ø60 110 E27 90% savings ~4.5W
VOLTAGE	100-240 V
FREQUENCY	50/60 Hz
DISPLACEMENT FACTOR	>0,5
CRI	> 80
SWITCHING CYCLE	>100.000
WARM UP TIME	≤ 0,5"
LIFETIME	25.000 h
EFFICIENCY CLASS	E
REF. CODE	H.LED.FIL.3K

E27 HIGH POWER LED

VOLTAGE
100-240V

CCT SETTABLE
3000 K 4000 K

ENERGY+
FUMAGALLI S.R.L.
H3.LED.HIP.CCT

CE LVD
CB EMC
ERP

INDOOR & OUTDOOR USE
-30 +80 °C 90% HUMIDITY
VOLTAGE SURGE RESISTANT

COMPLY WITH:
EU 2019/2015
EU 2019/2020

IECEE CB CERTIFICATE:
SG PSB-LE-03835
SG PSB-LE-03834

POWER	15 W	30W
LUMINOUS FLUX (Φ TOTAL)	3000 K 1545 lm 4000 K 1690 lm	3325lm 3620 lm
SIZE & SOCKET	 Ø100 165 E27	 Ø100 165 E27
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR	>0,7	>0,9
PSTLM (NO FLICKER)	<1	<1
SVM	0,4	0,4
CRI	> 80	> 80
SWITCHING CYCLE	30.000	30.000
WARM UP TIME	< 0,5"	< 1"
LIFETIME	25.000 h	25.000 h
EFFICIENCY CLASS	F	E
REF. CODE	H3.LED.HIP.CCT	H2.LED.HIP.CCT

E27 HIGH POWER LED

VOLTAGE
100-240V

SILICONE PROTECTION DRIVER

ENERGY+
FUMAGALLI S.R.L.
H4.LED.HIP.4K

CE LVD
CB EMC
ERP

INDOOR & OUTDOOR USE
-30 +80 °C 90% HUMIDITY
VOLTAGE SURGE RESISTANT

COMPLY WITH:
EU 2019/2015
EU 2019/2020

IECEE CB CERTIFICATE:
SG PSB-LE-03791
SG PSB-LE-03799

POWER	50 W	60W
LUMINOUS FLUX (Φ TOTAL)	3000 K 5850 lm 4000 K 6550 lm	6600 lm 7600 lm
SIZE & SOCKET	 Ø118 185 E27	 Ø118 205 E27
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR	>0,9	>0,9
PSTLM (NO FLICKER)	<1	<1
SVM	0,4	0,4
CRI	> 80	> 80
SWITCHING CYCLE	30.000	30.000
WARM UP TIME	< 1"	< 0,5"
LIFETIME	25.000 h	25.000 h
KELVIN	3000 K 4000 K	3000 K 4000 K
EFFICIENCY CLASS	E	E
REF. CODE	H.LED.HIP.3K H.LED.HIP.4K	H4.LED.HIP.3K H4.LED.HIP.4K

*SASO version available upon request

TÜV CERTIFIED LED MODULES



TÜV CERTIFIED LED MODULES

GX53 LED Ø75mm- CCT SETTABLE

VOLTAGE
100-240V

POWER	3000 K	3 W	405 lm
	4000 K		410 lm
	6500 K		410 lm
LUMINOUS FLUX (Φ TOTAL)			
SIZE & SOCKET			Ø75 GX53
LUMINOUS FLUX (Φ USE 120°)			335 lm
VOLTAGE			100-240 V
FREQUENCY			50/60 Hz
PSLM (NO FLICKER)			<1
SVM			0,4
CRI			> 80
SDCM			<6
BEAM ANGLE			112°
SWITCHING CYCLE			> 30.000
WARM UP TIME			0s
LIFETIME			25.000 h
EFFICIENCY CLASS			E
REF. CODE			H.LED.G53.CCT

CCT SETTABLE
3000 K 4000 K 6500 K
SDCM <4

ENERG+
FUMAGALLI S.R.L. - LEDS G53 CCT

TUV SUD
CE LVD EMC CB ERP

IECEE
CB SCHEME
SG PSB-LE-03887

INDOOR & OUTDOOR USE
-30 +80 °C 90% HUMIDITY
VOLTAGE SURGE RESISTANT

COMPLY WITH:
EU 2019/2015
EU 2019/2020

GX53 LED Ø100mm - CCT SETTABLE

VOLTAGE
100-240V

POWER	3000 K	10 W	1190 lm
	4000 K		1290 lm
	6500 K		1210 lm
LUMINOUS FLUX (Φ TOTAL)			
SIZE & SOCKET			Ø100 GX53
LUMINOUS FLUX (Φ USE 120°)			975 lm
VOLTAGE			100-240 V
FREQUENCY			50/60 Hz
DISPLACEMENT FACTOR			>0,5
PSLM (NO FLICKER)			< 1
SVM			0,4
CRI			> 80
SDCM			<6
BEAM ANGLE			112°
SWITCHING CYCLE			> 30.000
WARM UP TIME			0s
LIFETIME			25.000 h
EFFICIENCY CLASS			E
REF. CODE			H3.LED.G53.CCT

CCT SETTABLE
3000 K 4000 K 6500 K
SDCM <4

ENERG+
FUMAGALLI S.R.L. - LEDS G53 CCT

TUV SUD
CE LVD EMC CB ERP

IECEE
CB SCHEME
SG PSB-LE-03887

SILICON PROTECTION DRIVER
INDOOR & OUTDOOR USE
-30 +80 °C 90% HUMIDITY
VOLTAGE SURGE RESISTANT

COMPLY WITH:
EU 2019/2015
EU 2019/2020

NEW VERSION GX53 LED Ø160mm- POWER SETTABLE / CCT SETTABLE

VOLTAGE
100-240V

POWER	2700 K	15 W / 9 W eco mode	1780 lm 1200 lm
	4000 K		1940 lm 1300 lm
LUMINOUS FLUX (Φ TOTAL)			
SIZE & SOCKET			Ø160 34,3 GX53
VOLTAGE			100-240 V
FREQUENCY			50/60 Hz
DISPLACEMENT FACTOR			>0,9
PSLM (NO FLICKER)			<0,1
SVM			0,4
CRI			> 80
SDCM			<6
SWITCHING CYCLE			> 15.000
WARM UP TIME			≤ 0,5"
LIFETIME			25.000 h
EFFICIENCY CLASS			E
REF. CODE			H7.LED.G53.CCT

POWER SETTABLE
15W
SDCM <4

CCT SETTABLE
2700 K 4000 K
SDCM <4

ENERG+
FUMAGALLI S.R.L. - LEDS G53 CCT

TUV SUD
CE LVD EMC CB ERP

IECEE
CB SCHEME
SG PSB-LE-06107

INDOOR & OUTDOOR USE
-20 +40 °C 90% HUMIDITY
VOLTAGE SURGE RESISTANT

COMPLY WITH:
EU 2019/2015
EU 2019/2020

NEW VERSION SOLAR MODULE

VOLTAGE
100-240V

POWER	3000 K	10 W	1190 lm
	4000 K		1290 lm
	6500 K		1210 lm
LUMINOUS FLUX (Φ TOTAL)			
SIZE & SOCKET			Ø160 40
LUMINOUS FLUX (Φ USE 120°)			975 lm
VOLTAGE			100-240 V
FREQUENCY			50/60 Hz
DISPLACEMENT FACTOR			>0,5
PSLM (NO FLICKER)			< 1
SVM			0,4
CRI			> 80
SDCM			<6
BEAM ANGLE			112°
SWITCHING CYCLE			> 30.000
WARM UP TIME			0s
LIFETIME			25.000 h
EFFICIENCY CLASS			E
REF. CODE			H3.LED.G53.CCT

CCT SETTABLE
3000 K 4000 K 6500 K
SDCM <4

ENERG+
FUMAGALLI S.R.L. - LEDS G53 CCT

TUV SUD
CE LVD EMC CB ERP

IECEE
CB SCHEME
SG PSB-LE-03887

SILICON PROTECTION DRIVER
INDOOR & OUTDOOR USE
-30 +80 °C 90% HUMIDITY
VOLTAGE SURGE RESISTANT

COMPLY WITH:
EU 2019/2015
EU 2019/2020

LOOKING FOR SOMETHING ELSE?

GARDEN RANGE



PROJECT RANGE



TO SEE OUR COMPLETE COLLECTION

Ask for our NEW **General Catalogue 2025**
or visit our website at
www.fumagalli.it



MADE IN ITALY

211
DISTRIBUTORS
ALL OVER THE
WORLD

190
EMPLOYEES

COME TO VISIT US



RESIN MATERIAL ADVANTAGES



NO MAINTENANCE



ANTI-CORROSION



DOUBLE INSULATION



NOT AFFECTED BY
CHEMICAL FERTILIZERS



UV-RAY STABILIZED



RECYCLABLE



UV TREATED



DOUBLE
INSULATION



ANTI-SHOCK



TEMPERATURE



ENERGY SAVING



RESIDENTIAL



PUBLIC

HOW TO READ THE CODE

DIFFUSER
IDENTIFIES
THE DIFFUSER

V50

STRUCTURE
IDENTIFIES THE
STRUCTURE ON
WHICH THE DIFFUSER
IS MOUNTED (POLE,
BRACKET, BASE, SPIKE)

361

SYSTEM
IDENTIFIES THE
MULTILIGHT
SYSTEM IF PRESENT

A20

**COLOUR OF THE
STRUCTURE**
IDENTIFIES THE COLOUR
OF THE STRUCTURE
A BLACK
W WHITE
L GREY

A

**COLOUR OF THE
DIFFUSER**
IDENTIFIES THE COLOUR
OF THE DIFFUSER
X CLEAR/FROSTED
Y OPAL
Z SMOKED

X

ELECTRIFICATION
IDENTIFIES THE TYPE OF
ELECTRIFICATION AND
THE EVENTUAL
PRESENCE OF BULBS

H1L



Fumagalli S.r.l.
Via Ca'Bassa, 59
21100 Varese - ITALY
Tel.+39.0332.336353
Fax.+39.0332.336358
E-mail customerservice@fumagalli.it



www.fumagalli.it